

TECNOTION[®]

direct drive in motion



Frameless torque motor series



WE DIRECT DRIVE YOUR MOTION TECHNOLOGY

Tecnotion is the global authority on direct drive motor technology. We are the world's only unbundled manufacturer of linear and torque motors. As a former part of Philips, we specialize solely in the development and production of linear and torque motors. Because of this, our expertise, customer service and product quality are unmatched.

We have a global presence, with production plants in the Netherlands and China and local representation around the world. This ensures short delivery times and high quality support, wherever you are located.

When you do business with Tecnotion, you have a team of highly skilled sales and application engineers at your disposal. They help you from your initial prototype all the way to the application of our products and beyond.

Sales support

At Tecnotion we understand that each application of our motors is a unique case with specific requirements and demands.

Our sales and application engineers have extensive experience with a wide range of application types and collaborate on a high level with our customers to make sure you get the solution that best fits your requirements.

Additionally our specialized simulation tool is available to help you find your way through our wide range of motors and analyze/test out different motor types within your application specifications.




Innovation

We have an in-house R&D department, which is continuously pushing the boundaries of technology and taking our products to the next level. This translates directly to our high level of understanding of manufacturing processes.

Apart from our “off-the-shelf” range of standard motors, we can also design and manufacture custom made motors for high profile projects or OEM applications that require a tailor-made solution.

All our custom motors are built to the same high standards that characterize our standard range of products.

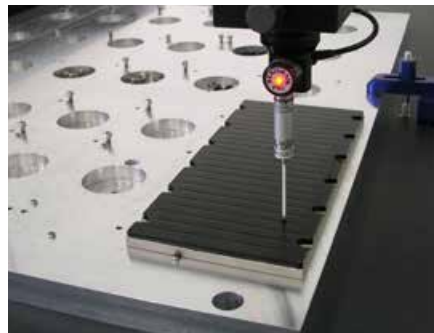

Manufacturing

Manufacturing of our standard range of motors takes place at our modern plant in China, where we are able to produce in high volume at very competitive rates.

At our competence centre and headquarters in the Netherlands we specialize in advanced technology. This is where we do our research and development and where custom motors are built with extreme accuracy in our special state of the art clean room environment.

Tecnotion is committed to excellence. Both of our plants are ISO 9001 certified and comply to the highest quality standards possible.



Global logistics

We always have our most popular products in stock in our warehouses in both the Netherlands and China.

Our logistics department can ship to you from both locations, making short delivery times possible across the globe, even when markets are ramping.



Frameless torque motor series

QTR-A	105	17	N
QTR/QTL-A = Torque (A = rotor options)			
105 = Series type/outer diameter			
17 = Motor height			
N = Winding type			



See
P.12

QTR-A 65 and 78 series

The QTR-A 65 and 78 are the smallest motors from our torque range. The largest QTR-A 78-60 motor offers an ultimate torque of 10.85 Nm. Compact sizing and low voltage support makes the QTR 65 motor ideal for robotics applications. Small build-space and a large 29 mm inner diameter make the QTR 78 motor a favorite in semiconductor machinery. To provide maximum flexibility and integration the motor is equipped with flying leads instead of a power cable.

These motor series comes in two diameters: 65 and 78 mm and four heights: 17, 25, 34 and 60 mm.



See
P.16

QTR-A 105-133-160 series

Our medium range motors are available with a range of options. Different winding types are available, optimizing back EMF. A digital Hall sensor can be used as a 'wake and shake' replacement, simplifying the startup of the QTR motor. The largest QTR-A 160-60 motor, excels with 91.6 Nm ultimate torque. Various applications such as in medical, testing equipment, and factory automation benefit from the large inner diameter and the high peak torque of the series.

These motor series comes in three diameters: 105, 133 and 160 mm and four heights: 17, 25, 34 and 60 mm.



See
P.22


QTL-A 210-230-290-310-385-485 series

The QTL motor series are our largest torque motors up to date, yet very compact for the generated torque. The QTL is frameless as all our QTR motors and therefore it can be integrated directly into the machine structure, while the spacious open inner diameter enables wire and cable feed through. The series are suitable for a variety of markets including rotary indexing tables, printing machinery and materials handling. Available with (QTL 230, 310, 385 and 485) or without cooling ring (QTL 210 and 290). The QTL-A motor series comes in six diameters (210, 230, 290, 310, 385 and 485 mm) and three heights (65, 85 and 105 mm) for 210 – 310 and two heights (85 and 105 mm) for 385-485.

Motor torque range


Ultimate torque

Continuous torque

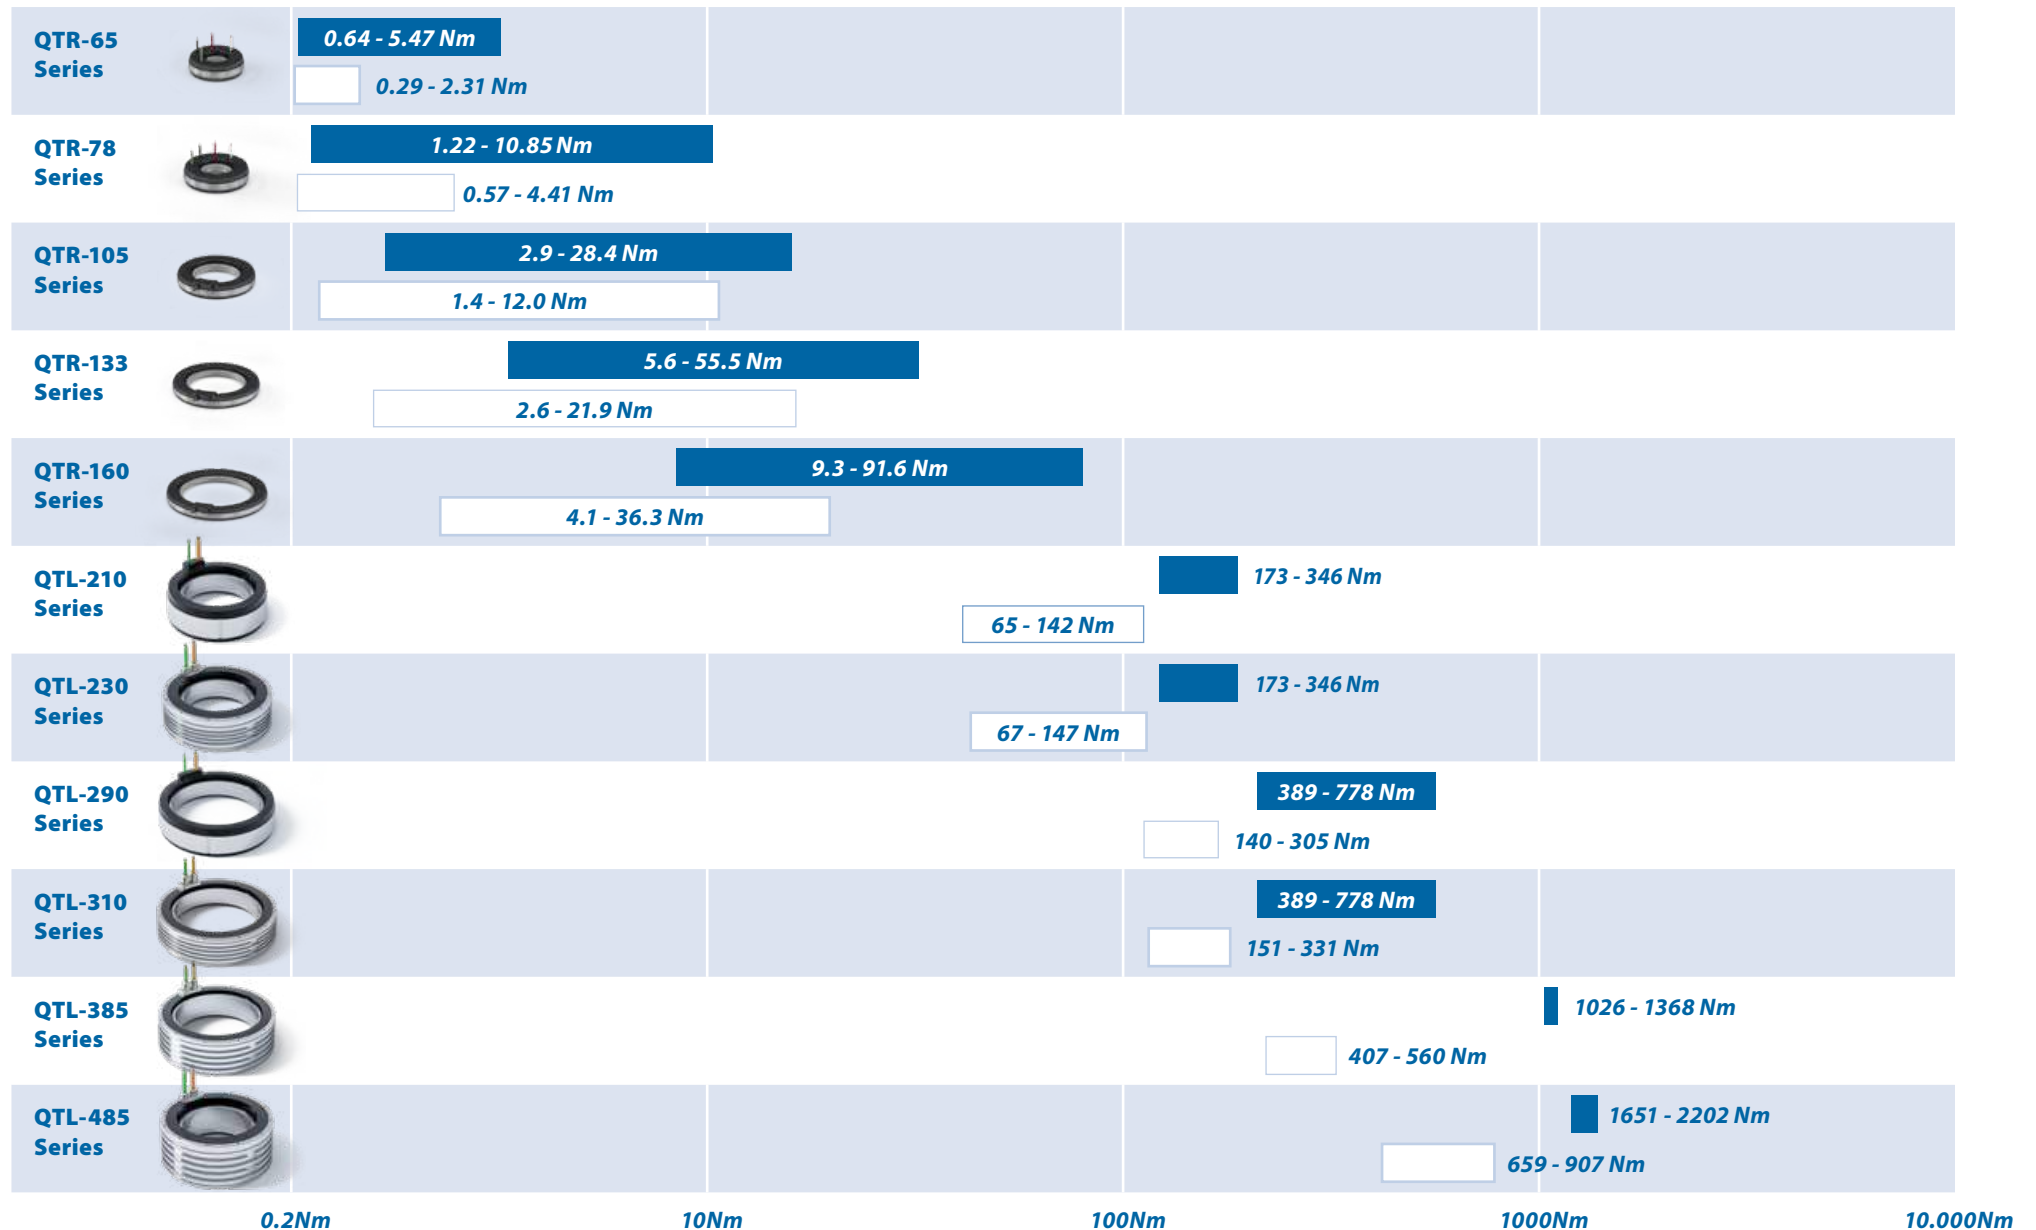


Torque QTR motor series

Properties QTR-A 65 and 78

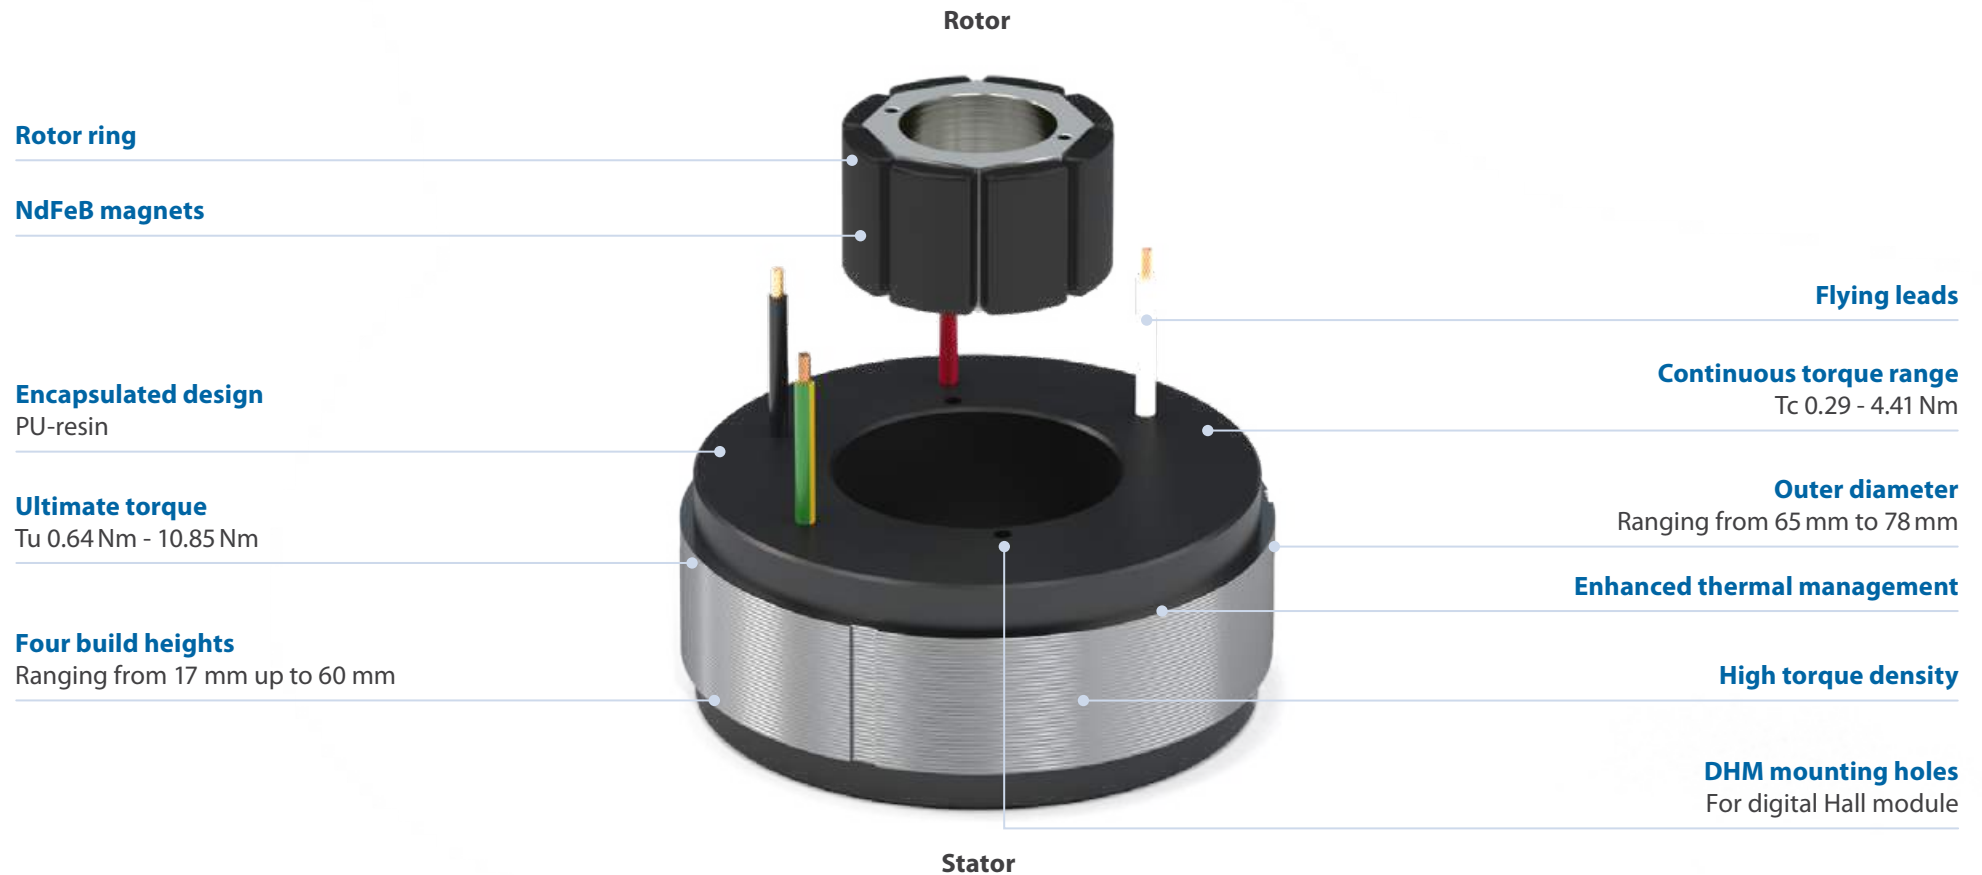


Torque QTR motor series

Properties QTR-A 105, 133 and 160

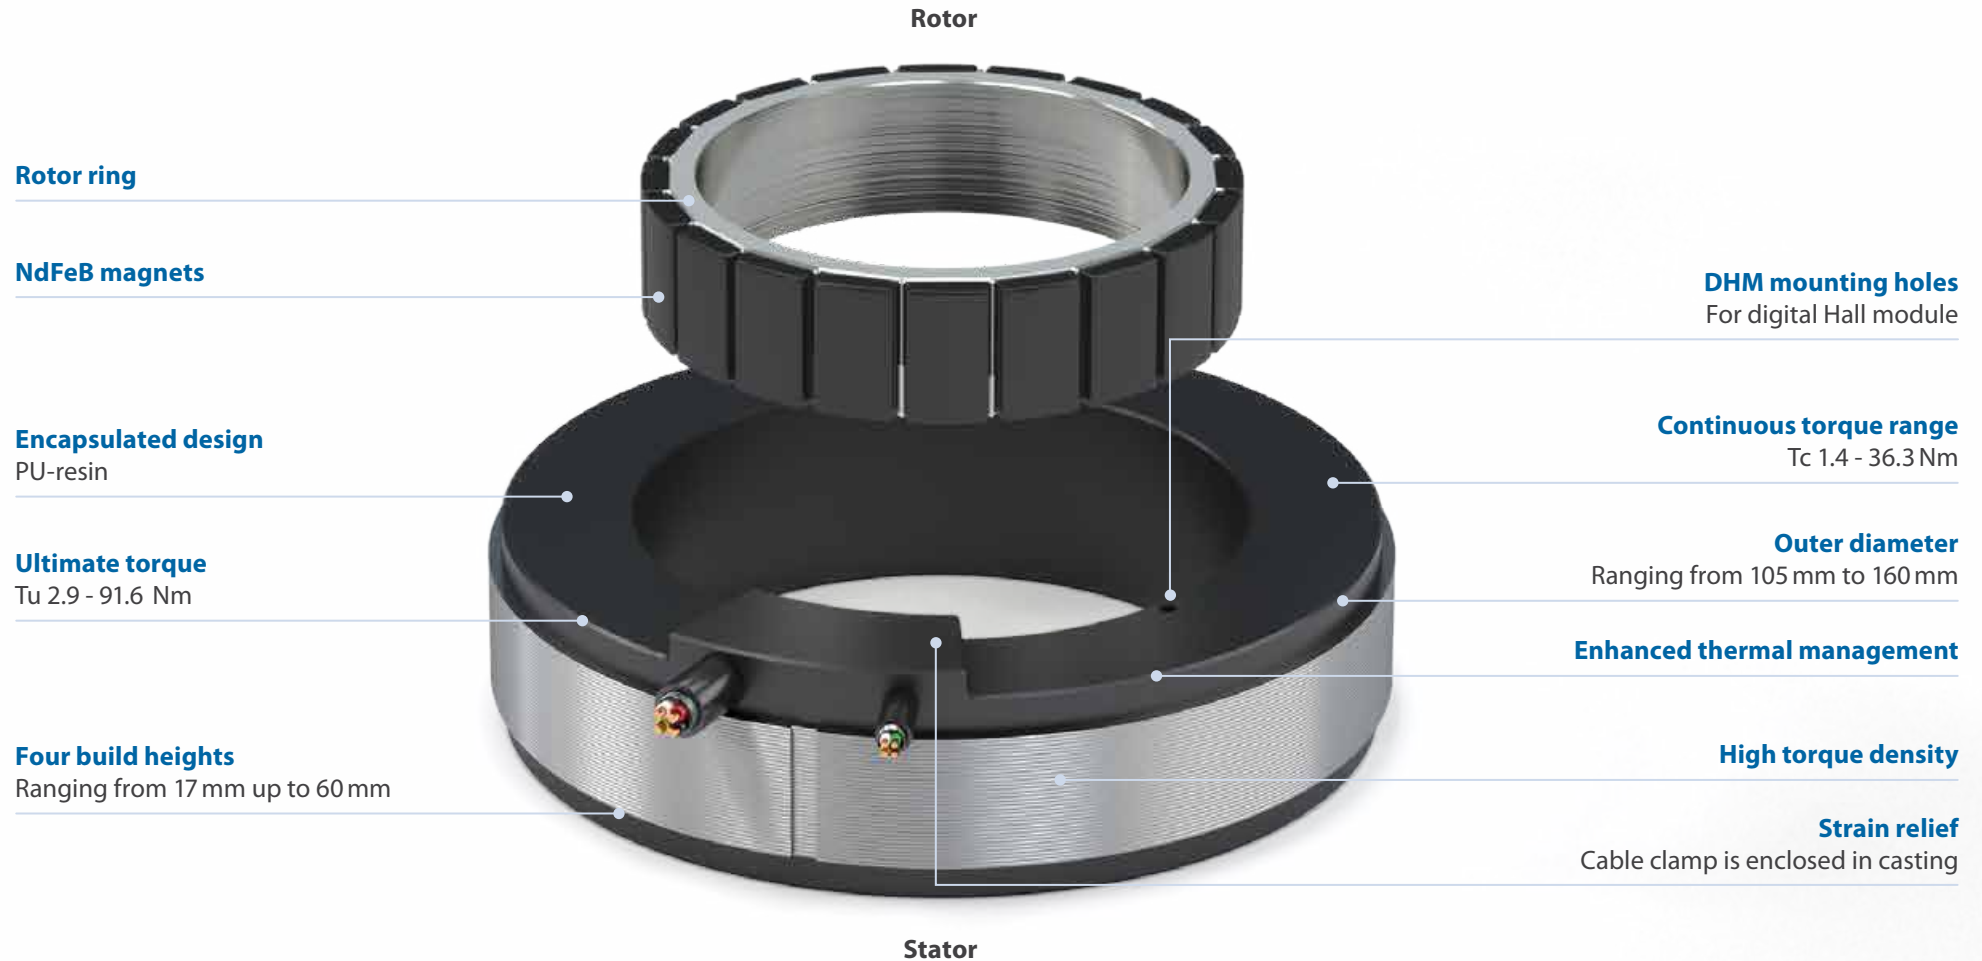

Torque QTL motor series

Properties QTL-A 210 and 290

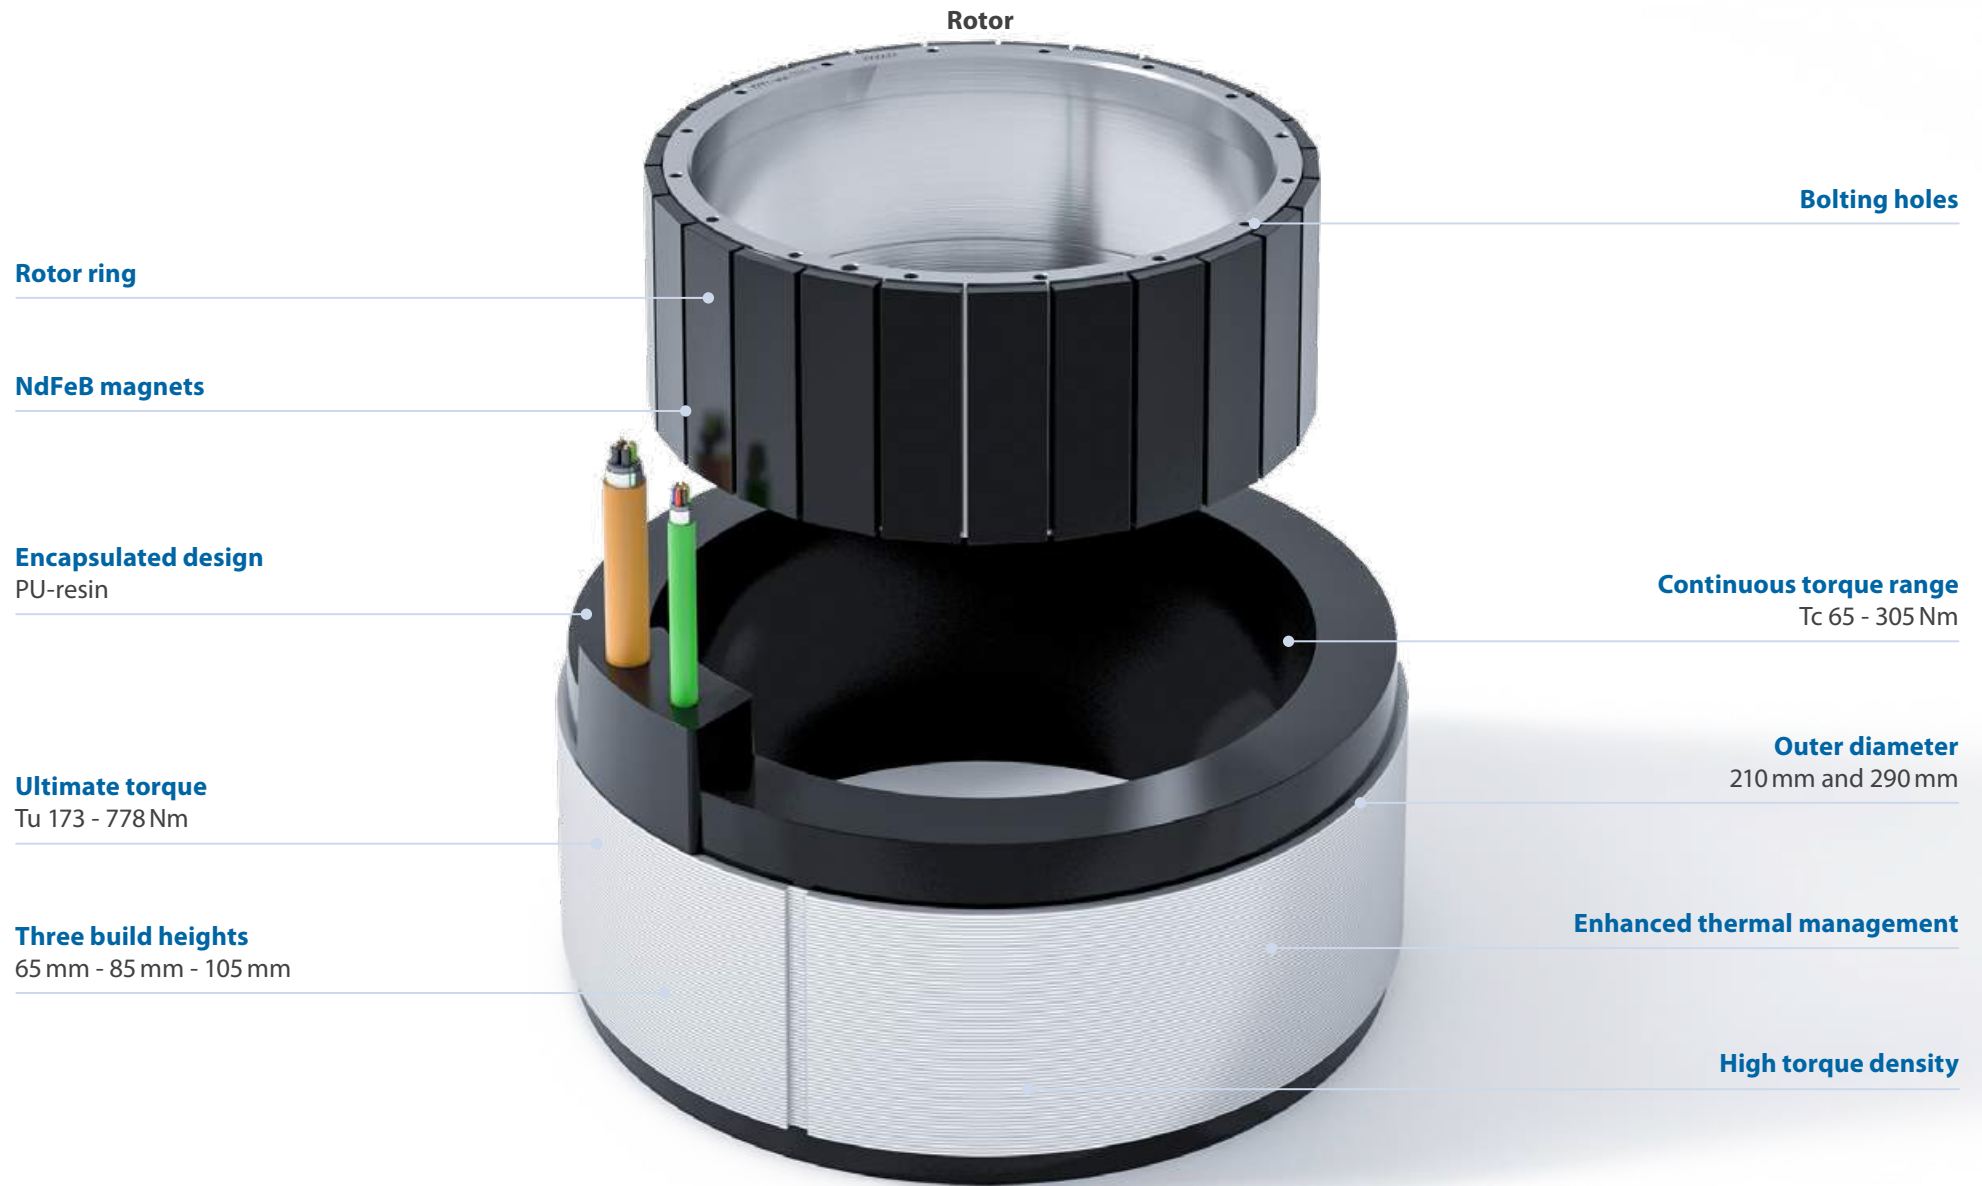

Properties QTL-A 230, 310, 385 and 485



Bolting holes

Rotor ring

NdFeB magnets

Encapsulated design
PU-resin

Ultimate torque
Tu 173 - 2202 Nm

Three build heights

65 mm - 85 mm - 105 mm

Continuous torque range
Tc 67 - 907 Nm

Outer diameter
Ranging from 230 mm to 485 mm

Cooling ring
for water cooling

High torque density

Stator

Features


Tecnotion's QTR torque motor performance advantages

The direct drive technology of brushless torque motors is a perfect way to enhance productivity, accuracy, and dynamic performance of applications. The technology lowers costs, makes designs slimmer, and reduce wear and tear. Torque motors eliminate the need for mechanical transmissions like gearboxes, belts and speed reducers. Between rotor and stator there is no contact, this means no mechanical wear.



Direct drive

Higher stiffness no backlash.



Low cogging value, low total harmonic distortion (THD)

For smooth motion and position accuracy in your application.



Large inner diameter

Allows easy integration of a large number of cables and hoses or allows large shaft fittings.



Ultra thin design

The lower build height allows to build a flatter axis, resulting in less tipping and settling time. Extraordinary flexibility in designing the motor into small spaces.



Encapsulated design

No open coil wires which can be damaged or that need to be covered up for safety reasons.



High voltage insulated, up to 300 VDC/600 VDC bus voltage

Enabling the use of a wide range of servo drives, and power supplies.



Tecnotion QTR has the highest torque density in the market

More torque in a smaller packing means lowering footprint.



Shielded cable with strain relief

No shielding EMC issues with loose wires. No risk to damage the motor by accidentally pulling the cable.



Good product repeatability

All motors have specifications with extremely little variation between them.



Low thermal resistance

Allowing good heat transfer, achieving an extremely high continuous torque when using a decent size heatsink or active cooling.



Low stator and rotor mass


Lower masses increase the dynamics and response of the system by lowering the inertia. It hands the opportunity to improve entire stage designs. And as a result, lowering an applications cost of ownership.




100% QC

All products are 100% mechanically and electrically tested.


Torque QTR-A digital Hall module

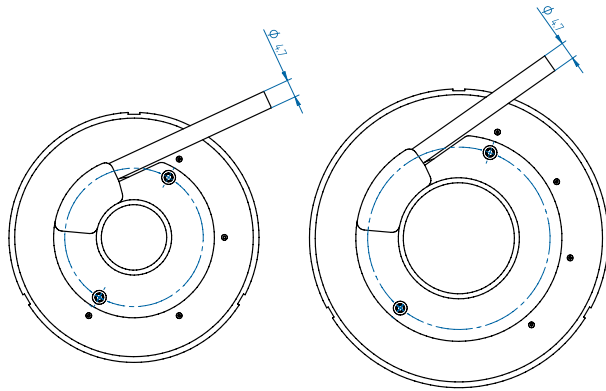


Digital Hall module mounted*
on QTR-A 65 series

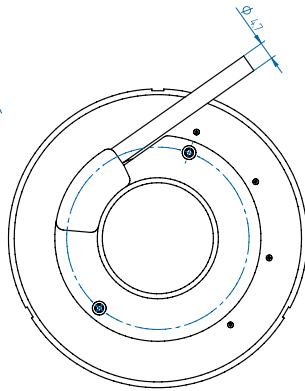


Digital Hall module mounted*
on QTR-A 78 series

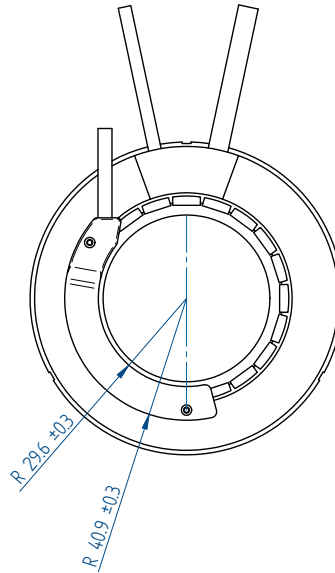

Digital Hall module mounted*
on QTR-A 105 series

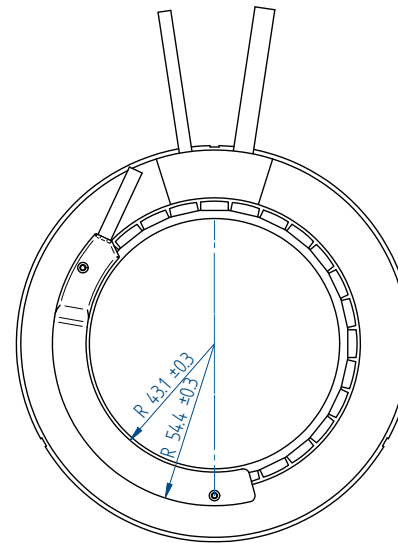

Digital Hall module mounted*
on QTR-A 133 series

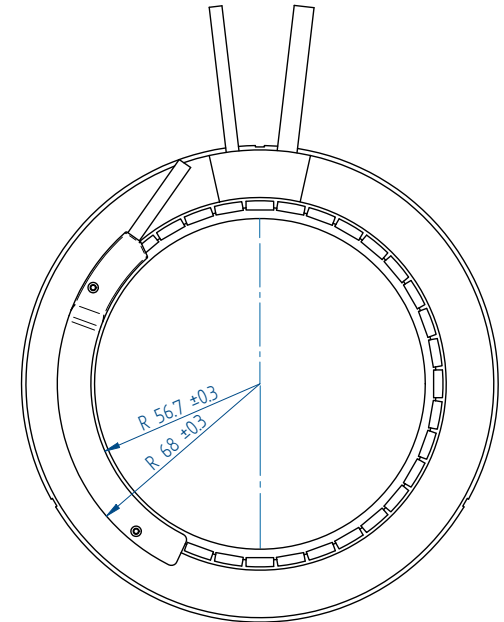

Digital Hall module mounted*
on QTR-A 160 series



Tecnotion QTR motors can be equipped with a Tecnotion QTR digital Hall module. The module covers a small portion of the motor and measures just a little over 3 mm in thickness for the largest part. When a QTR stator is not powered the Tecnotion QTR digital Hall module can be used to determine the electrical position of the rotor. It is a 'wake and shake' replacement, simplifying the startup of the QTR motor. Digital Hall sensors are available for the QTR-A 65, 78, 105, 133 and 160 series.

Specifications

Input voltage: 5V....15Vdc

Output voltage: 3 phase TTL, max 2.5mA, 5Vdc
AquadB TTL, max 2.5mA, 5Vdc



*Mounting instructions and tolerances can be found in the torque installation manual. Manuals and 3D CAD files can be downloaded from our website.

Torque QTR-A 65 series



QTR-A 65 Stator and rotor shown
with a height of 17 mm

Parameter	Remarks	Symbol	Unit	QTR-A 65-17	QTR-A 65-25	QTR-A 65-34	QTR-A 65-60
Performance				N	N	Y	Y
Winding type				N			
Motor type max. voltage ph-ph	3-phase synchronous		$V_{ac rms} (V_{dc})$	420 (600)			
Ultimate torque @ 20°C/s increase	magnet @ 25°C	T_u	Nm	0.64	1.31	2.25	5.47
Peak torque @ 6°C/s increase	magnet @ 25°C	T_p	Nm	0.42	0.85	1.43	3.82
Continuous torque	coil @ 100°C	T_c	Nm	0.29	0.66	1.08	2.31
Maximum speed ⁽³⁾ @ 48 Volt	@ T_c	n_{max}	rpm	5735	2673	3456	910
Maximum speed ⁽³⁾ @ max. voltage	@ T_c	n_{max}	rpm	28000	28000	28000	16960
Motor torque constant	up to I_c	K_t	Nm/A _{rms}	0.060	0.118	0.098	0.267
Motor constant	coils @ 25°C	K_m	(Nm) ² /W	0.0021	0.0059	0.0111	0.0321
Electrical							
Ultimate current	magnet @ 25°C	I_u	A _{rms}	13.84	13.84	27.98	24.99
Peak current	magnet @ 25°C	I_p	A _{rms}	7.58	7.58	15.32	15.05
Maximum continuous current ⁽¹⁾	coils @ 100°C	I_c	A _{rms}	4.86	5.61	11.07	8.65
Back EMF phase-phase _{peak}		K_e	V/krpm	5.1	10.1	8.4	22.8
Back EMF phase-phase _{RMS}		K_e	V/krpm	3.6	7.2	5.9	16.1
Coil resistance per phase	coils @ 25°C ex. cable	R	Ω	0.575	0.799	0.287	0.741
Coil induction per phase	$L < 0.6 I_p$	L	mH	0.86	1.62	0.69	2.10
Electrical time constant	coils @ 25°C	τ_e	ms	1.5	2.0	2.4	2.8
Poles		N_{mgn}	nr	8	8	8	8
Thermal							
Continuous power loss	coils @ 100°C	P_c	W	53	99	138	217
Thermal resistance ⁽²⁾	coils to mount. sfc.	R_{th}	°C/W	1.50	0.81	0.58	0.37
Thermal time constant	up to 63% max. coiltemp.	τ_{th}	s	21	16	16	38
Temperature cut-off / sensor				No temperature sensor			
Mechanical							
Stator OD		OD_s	mm	65			
Rotor ID		ID_R	mm	17			
Motor height		H_{motor}	mm	18	26	35	62
Lamination stack height		H_{arm}	mm	8	16	24	48
Rotor inertia		J_R	kg*m ²	3.8E-06	7.5E-06	1.1E-05	2.3E-05
Stator mass	excluding cables	M_s	g	149	248	361	717
Rotor mass		M_R	g	27	54	80	160
Total mass	excluding cables	M_T	g	176	302	441	877
Cable mass	all cables	m	g	36			
Cable type (power)	length 0.5 m	d	mm (AWG)	2.06 (16)			

1. These values are only applicable when the mounting surface is at 20°C and the motor is driven at maximum continuous current. If these values differ in your application, please check our simulation tool or manual.
2. R_{th} based on radial mounting of stator lamination stack.
3. MAXIMUM allowable speed for QTR-A 65 series motors is 28.000 rpm. If you plan a high speed application, please contact Tecnotion.









All specifications ±10%

QTR-A 65-17

QTR-A 65-25

QTR-A 65-34

QTR-A 65-60

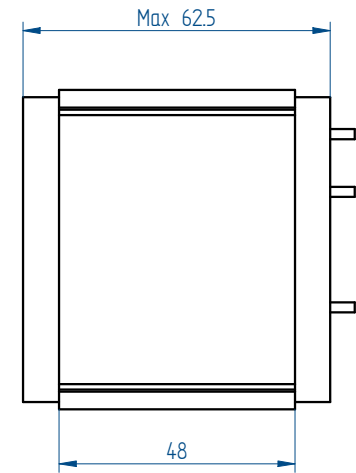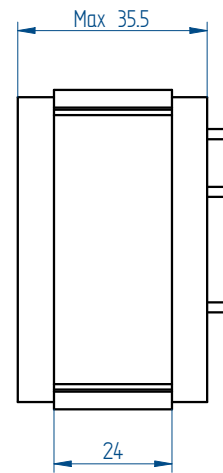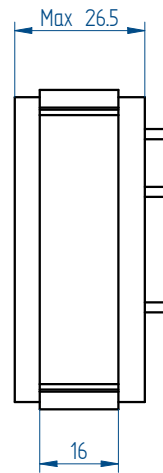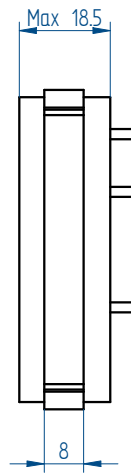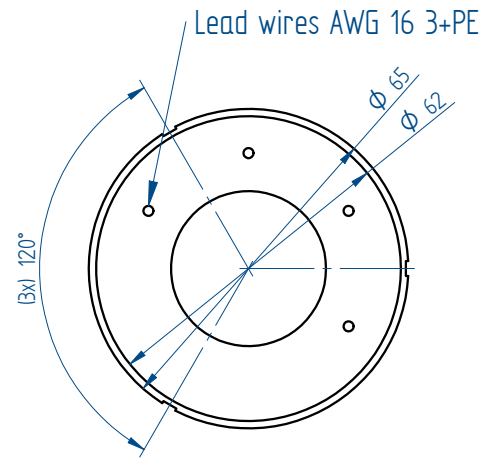Stator**Rotor**

Mounting instructions and tolerances can be found in the torque installation manual. Manuals and 3D CAD files can be downloaded from our website.

* All sizes are in mm

Torque QTR-A 78 series



QTR-A 78 Stator and rotor shown
with a height of 17 mm

Parameter	Remarks	Symbol	Unit	QTR-A 78-17	QTR-A 78-25	QTR-A 78-34	QTR-A 78-60
Performance				N	Y	Y	Y
Winding type				N	Y	Y	Y
Motor type max. voltage ph-ph	3-phase synchronous		$V_{ac\ rms} (V_{dc})$	420 (600)			
Ultimate torque @ 20°C/s increase	magnet @ 25°C	T_u	Nm	1.22	2.93	4.54	10.85
Peak torque @ 6°C/s increase	magnet @ 25°C	T_p	Nm	0.84	1.90	2.88	7.57
Continuous torque	coil @ 100°C	T_c	Nm	0.57	1.38	2.19	4.41
Maximum speed ⁽³⁾ @ 48 Volt	@ T_c @ 48 V_{dc}	n_{max}	rpm	2657	2360	1463	324
Maximum speed @ max. voltage	@ T_c	n_{max}	rpm	23000	23000	23000	8147
Motor torque constant	up to I_c	K_t	Nm/A _{rms}	0.117	0.131	0.198	0.530
Motor constant	coils @ 25°C	K_m	(Nm) ² /W	0.0053	0.0166	0.0304	0.0842
Electrical							
Ultimate current	magnet @ 25°C	I_u	A _{rms}	13.84	27.98	27.98	24.99
Peak current	magnet @ 25°C	I_p	A _{rms}	7.58	15.32	15.32	15.05
Maximum continuous current ⁽¹⁾	coils @ 100°C	I_c	A _{rms}	4.89	10.56	11.08	8.33
Back EMF phase-phase _{peak}		K_e	V/krpm	10.0	11.2	16.9	45.3
Back EMF phase-phase _{RMS}		K_e	V/krpm	7.1	7.9	12.0	32.0
Coil resistance per phase	coils @ 25°C ex. cable	R	Ω	0.857	0.342	0.430	1.111
Coil induction per phase	$L < 0.6 I_p$	L	mH	1.35	0.76	1.04	3.4
Electrical time constant	coils @ 25°C	τ_e	ms	1.6	2.2	2.4	3.1
Poles		N_{mgn}	nr	12	12	12	12
Thermal							
Continuous power loss	coils @ 100°C	P_c	W	80	150	207	302
Thermal resistance ⁽²⁾	coils to mount. sfc.	R_{th}	°C/W	0.99	0.53	0.39	0.26
Thermal time constant	up to 63% max. coiltemp.	τ_{th}	s	20	16	16	41
Temperature cut-off / sensor				No temperature sensor			
Mechanical							
Stator OD		OD_s	mm	78			
Rotor ID		ID_R	mm	29			
Motor height		H_{motor}	mm	18	26	35	62
Lamination stack height		H_{arm}	mm	8	16	24	48
Rotor inertia		J_R	kg*m ²	1.3E-05	2.5E-05	3.8E-05	7.6E-05
Stator mass	excluding cables	M_s	g	208	353	501	1003
Rotor mass		M_R	g	42	84	126	243
Total mass	excluding cables	M_T	g	250	437	627	1246
Cable mass	all cables	m	g	36			
Cable type (power)	length 0.5 m	d	mm (AWG)	2.06 (16)			

1. These values are only applicable when the mounting surface is at 20°C and the motor is driven at maximum continuous current. If these values differ in your application, please check our simulation tool or manual.
2. R_{th} based on radial mounting of stator lamination stack.
3. MAXIMUM allowable speed for QTR-A 78 series motors is 23.000 rpm. If you plan a high speed application, please contact Tecnotion.











All specifications ±10%

QTR-A 78-17

QTR-A 78-25

QTR-A 78-34

QTR-A 78-60

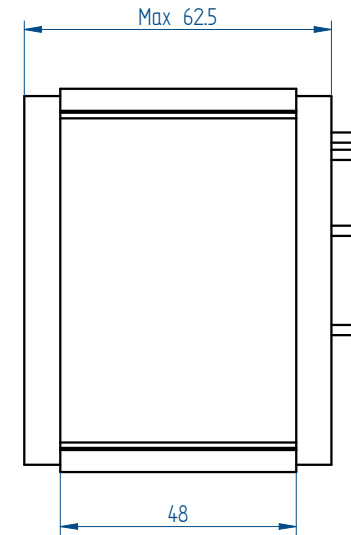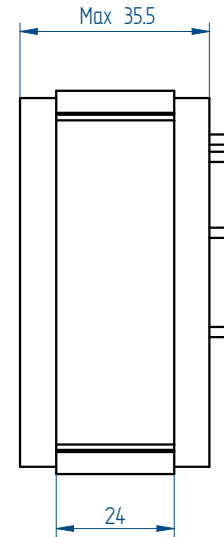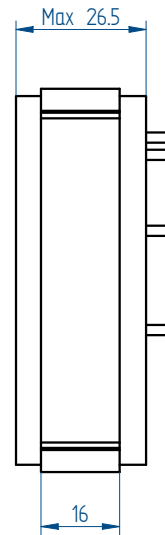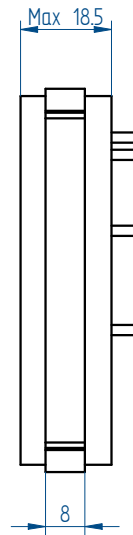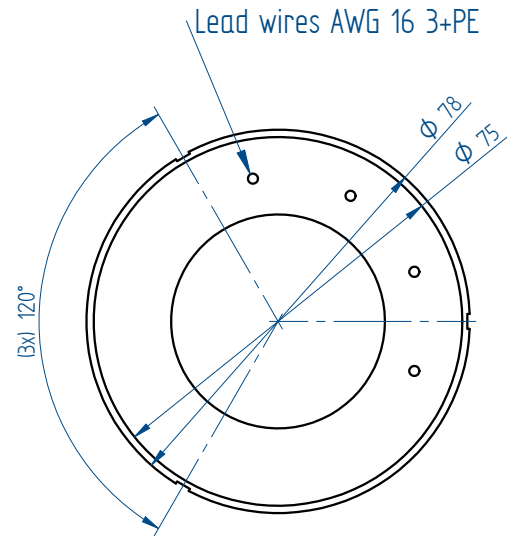Stator**Rotor**

Mounting instructions and tolerances can be found in the torque installation manual. Manuals and 3D CAD files can be downloaded from our website.

* All sizes are in mm

Torque QTR-A 105 series








QTR-A-105 Stator and rotor shown
with a height of 17 mm

1. These values are only applicable when the mounting surface is at 20°C and the motor is driven at maximum continuous current. If these values differ in your application, please check our simulation tool or manual.
2. Rth based on radial mounting of stator lamination stack.
3. MAXIMUM allowable speed for QTR-A 105 series motors is 16.500 rpm. If you plan a high speed application, please contact Tecnotion.




	Parameter	Remarks	Symbol	Unit	QTR-A-105-17			QTR-A-105-25			QTR-A-105-34			QTR-A-105-60
Performance	Winding type				N	Y	Z	N	Y	Z	N	Y	Z	N
	Motortype max. voltage ph-ph	3-phase synchronous		V _{ac rms} (V _{dc})	230 (325)									420 (600)
	Ultimate torque @ 20°C/s increase	magnet @ 25°C	T _u	Nm	2.9	3.3	3.3	6.1	7.5	6.9	10.6	11.3	10.4	28.4
	Peak torque @ 6°C/s increase	magnet @ 25°C	T _p	Nm	1.9	2.2	2.2	3.9	4.4	4.4	6.7	6.6	6.6	18.1
	Continuous torque	coil @ 100°C	T _c	Nm	1.4	1.4	1.4	3.2	3.3	3.3	5.4	5.2	5.2	12.0
	Maximum speed ⁽³⁾ @ 48 Volt	@ T _c	n _{max}	rpm	784	1761	3300	240	783	1623	0	444	1028	0
	Maximum speed @ max. voltage	@ T _c	n _{max}	rpm	6890	12286	16500	3625	6534	11399	1928	4439	7833	1455
	Motor torque constant	up to I _c	K _t	Nm/A _{rms}	0.30	0.17	0.10	0.60	0.33	0.19	1.07	0.50	0.29	2.86
	Motor constant	coils @ 25°C	K _m	(Nm) ² /W	0.021	0.022	0.022	0.061	0.065	0.065	0.127	0.115	0.120	0.40
Electrical	Ultimate current	magnet @ 25°C	I _u	A _{rms}	13.8	28.2	48.8	13.8	28.2	48.8	13.3	28.2	48.8	13.5
	Peak current	magnet @ 25°C	I _p	A _{rms}	7.6	15.4	26.7	7.6	15.4	26.7	7.3	15.4	26.7	7.37
	Maximum continuous current ⁽¹⁾	coils @ 100°C	I _c	A _{rms}	4.6	8.5	14.7	5.3	9.8	17.0	5.1	10.3	17.9	4.2
	Back EMF phase-phase _{peak}		K _e	V/krpm	25	14	8	51	28	16	92	43	25	244
	Back EMF phase-phase _{RMS}		K _e	V/krpm	18	10	6	36	20	12	65	30	17	173
	Coil resistance per phase	coils @ 25°C ex. cable	R	Ω	1.38	0.43	0.14	1.93	0.57	0.19	3.02	0.74	0.24	6.84
	Coil induction per phase	L < 0.6 I _p	L	mH	2.58	0.83	0.28	4.05	1.29	0.43	7.93	1.75	0.59	25.3
	Electrical time constant	coils @ 25°C	τ _e	ms	1.9	2.0	1.9	2.1	2.3	2.2	2.6	2.4	2.4	3.7
	Poles		N _{mgn}	nr	20	20	20	20	20	20	20	20	20	20
Thermal	Continuous power loss	coils @ 100°C	P _c	W	115	115	115	214	214	214	300	300	300	469
	Thermal resistance ⁽²⁾	coils to mount. sfc.	R _{th}	°C/W	0.65	0.65	0.65	0.35	0.35	0.35	0.25	0.25	0.25	0.16
	Thermal time constant	up to 63% max. coiltemp.	τ _{th}	s	21	25	25	16	18	18	17	17	17	25
	Temperature cut-off / sensor				PTC 1kΩ / KTY83-122									
Mechanical	Stator OD		OD _S	mm	105									
	Rotor ID		ID _R	mm	56									
	Motor height		H _{motor}	mm	17			25			34			60
	Lamination stack height		H _{arm}	mm	8			16			24			48
	Rotor inertia		J _R	kg*m ²	8.0E-05			1.5E-04			2.2E-04			4.3E-04
	Stator mass	excluding cables	M _S	g	299			472			746			1476
	Rotor mass		M _R	g	79			146			218			433
	Total mass	excluding cables	M _T	g	378			618			964			1909
	Cable mass	all cables	m	g	63	90	90	63	90	90	63	90	90	95
	Cable type (power)	length 0.5 m	d	mm (AWG)	6.5 (20)	6.7 (14)	6.7 (14)	6.5 (20)	6.7 (14)	6.7 (14)	6.5 (20)	6.7 (14)	6.7 (14)	9.6 (18)
	Cable type (sensor)	length 0.5 m	d	mm (AWG)	4.3 (26)									

All specifications ±10%

Stator

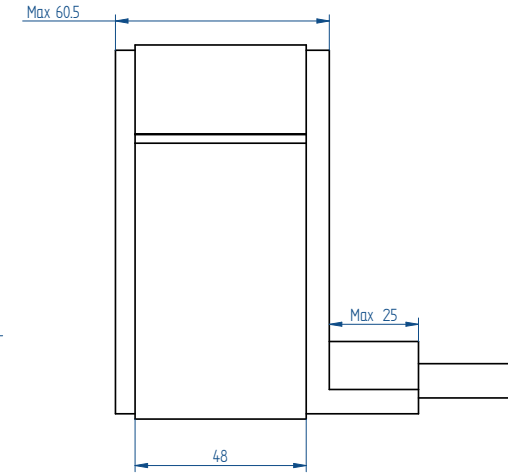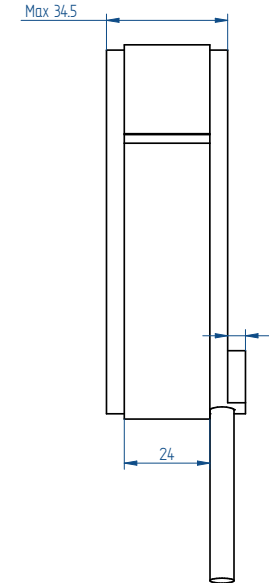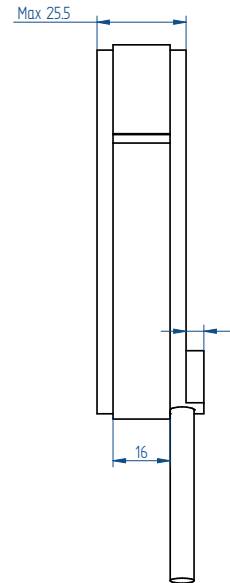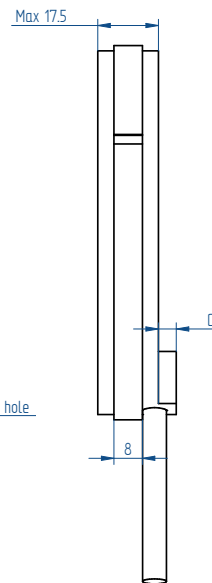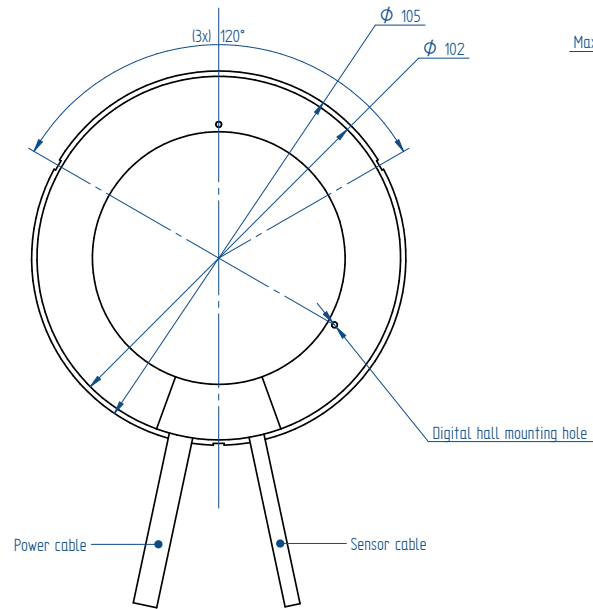

Rotor



Winding	C (mm)
N	3.5
Y+Z	5.5

Torque QTR-A 133 series




QTR-A-133 Stator and rotor shown
with a height of 17 mm

1. These values are only applicable when the mounting surface is at 20°C and the motor is driven at maximum continuous current. If these values differ in your application, please check our simulation tool or manual.
2. R_{th} based on radial mounting of stator lamination stack.
3. MAXIMUM allowable speed for QTR-A 133 series motors is 14.000 rpm. If you plan a high speed application, please contact Tecnotion.


Parameter	Remarks	Symbol	Unit	QTR-A-133-17			QTR-A-133-25			QTR-A-133-34		QTR-A-133-60
Winding type				N	Y	Z	N	Y	Z	N	Z	N
Motor type max. voltage ph-ph	3-phase synchronous		V _{ac rms} (V _{dc})	230 (325)								420 (600)
Ultimate torque @ 20°C/s increase	magnet @ 25°C	T _u	Nm	5.6	6.4	6.4	11.9	13.5	13.5	20.6	20.3	55.5
Peak torque @ 6°C/s increase	magnet @ 25°C	T _p	Nm	3.8	4.3	4.3	7.5	8.6	8.6	13.1	12.9	35.3
Continuous torque	coil @ 100°C	T _c	Nm	2.6	2.6	2.6	5.9	6.0	6.0	10.0	9.5	21.9
Maximum speed ⁽³⁾ @ 48 Volt	@ T _c	n _{max}	rpm	317	839	1641	33	345	788	0	478	0
Maximum speed @ max. voltage	@ T _c	n _{max}	rpm	3514	6340	10807	1825	3389	5930	946	4040	724
Motor torque constant	up to I _c	K _t	Nm/A _{rms}	0.58	0.33	0.19	1.16	0.65	0.38	2.09	0.56	5.57
Motor constant	coils @ 25°C	K _m	(Nm) ² /W	0.058	0.061	0.061	0.167	0.177	0.180	0.344	0.310	1.08
Ultimate current	magnet @ 25°C	I _u	A _{rms}	13.8	28.2	48.8	13.8	28.2	48.8	13.3	48.8	13.5
Peak current	magnet @ 25°C	I _p	A _{rms}	7.56	15.40	26.70	7.56	15.40	26.70	7.31	26.70	7.37
Maximum continuous current ⁽¹⁾	coils @ 100°C	I _c	A _{rms}	4.43	8.10	14.00	5.05	9.30	16.10	4.77	16.90	3.93
Back EMF phase-phase _{peak}		K _e	V/krpm	50	28	16	99	56	32	179	48	476
Back EMF phase-phase _{RMS}		K _e	V/krpm	35	20	11	70	39	23	126	34	337
Coil resistance per phase	coils @ 25°C ex. cable	R	Ω	1.93	0.58	0.20	2.70	0.80	0.27	4.23	0.34	9.58
Coil induction per phase	I < 0.6 I _p	L	mH	3.74	1.20	0.40	5.87	1.87	0.62	11.50	0.85	36.6
Electrical time constant	coils @ 25°C	τ _e	ms	1.9	2.1	2.0	2.2	2.4	2.3	2.7	2.5	3.8
Poles		N _{mgn}	nr	28	28	28	28	28	28	28	28	28
Continuous power loss	coils @ 100°C	P _c	W	147	147	147	268	268	268	375	375	577
Thermal resistance ⁽²⁾	coils to mount. sfc.	R _{th}	°C/W	0.51	0.51	0.51	0.28	0.28	0.28	0.20	0.20	0.13
Thermal time constant	up to 63% max. coiltemp.	τ _{th}	s	23	27	27	18	21	21	19	19	29
Temperature cut-off / sensor				PTC 1kΩ / KTY83-122								
Stator OD		OD _s	mm	133								
Rotor ID		ID _R	mm	84								
Motor height		H _{motor}	mm	17			25			34		60
Lamination stack height		H _{arm}	mm	8			16			24		48
Rotor inertia		J _R	kg*m ²	2.1E-04			4.2E-04			6.2E-04		1.2E-03
Stator mass	excluding cables	M _s	g	414			717			1037		2090
Rotor mass		M _R	g	106			208			309		613
Total mass	excluding cables	M _T	g	520			925			1346		2703
Cable mass	all cables	m	g	63	90	90	63	90	90	63	90	95
Cable type (power)	length 0.5 m	d	mm (AWG)	6.5 (20)	6.7 (14)	6.7 (14)	6.5 (20)	6.7 (14)	6.7 (14)	6.5 (20)	6.7 (14)	9.6 (18)
Cable type (sensor)	length 0.5 m	d	mm (AWG)	4.3 (26)								

All specifications ±10%



Stator

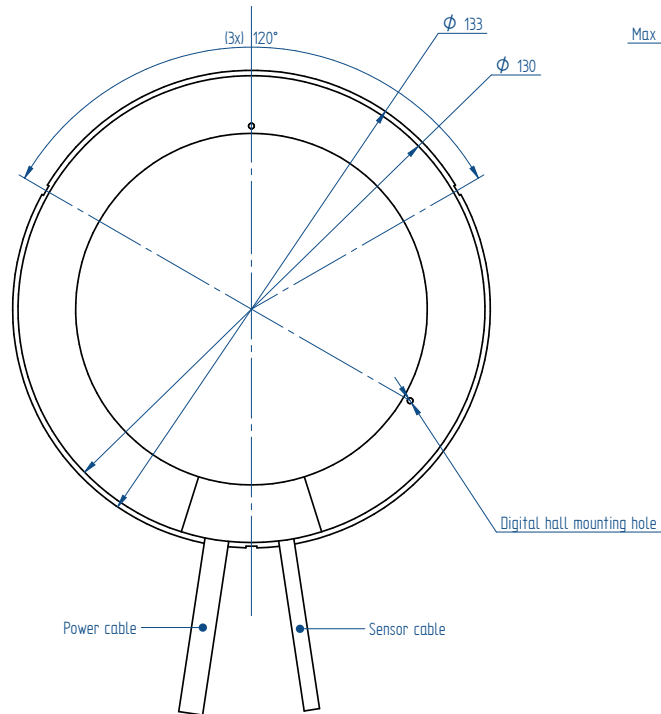


Rotor





QTR-A 133-17

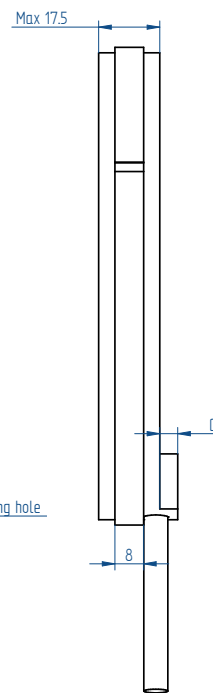



QTR-A 133-25

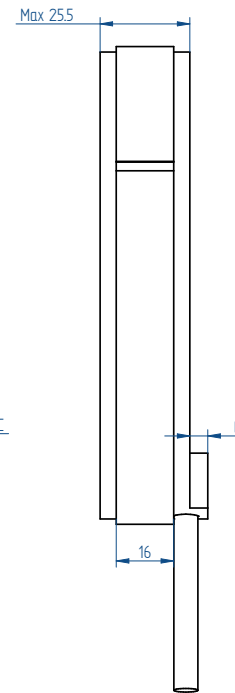

QTR-A 133-34

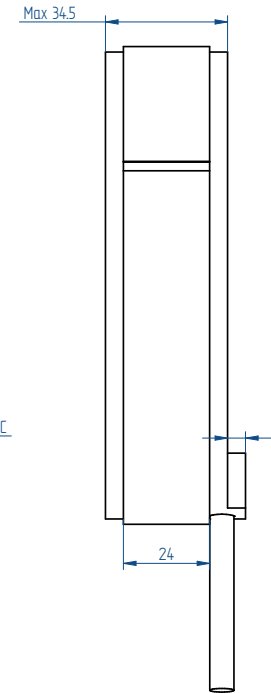

QTR-A 133-60

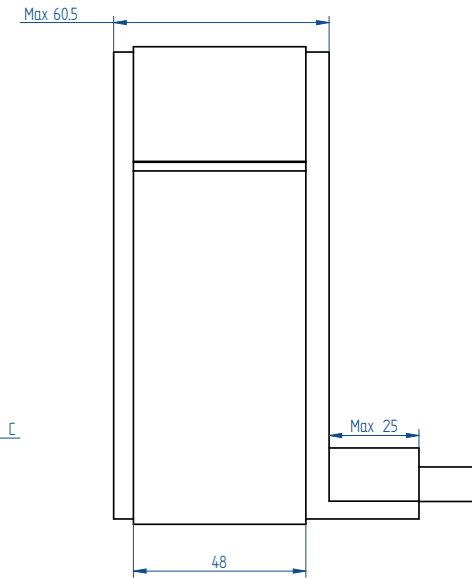

Winding	C (mm)
N	3.5
Y+Z	5.5

Mounting instructions and tolerances can be found in the torque installation manual. Manuals and 3D CAD files can be downloaded from our website.

* All sizes are in mm

Torque QTR-A 160 series




QTR-A-160 Stator and rotor shown
with a height of 17 mm

1. These values are only applicable when the mounting surface is at 20°C and the motor is driven at maximum continuous current. If these values differ in your application, please check our simulation tool or manual.
2. R_{th} based on radial mounting of stator lamination stack.
3. MAXIMUM allowable speed for QTR-A 160 series motors is 12.000 rpm. If you plan a high speed application, please contact Tecnotion.


Parameter	Remarks	Symbol	Unit	QTR-A-160-17			QTR-A-160-25			QTR-A-160-34		QTR-A-160-60
Winding type				N	Y	Z	N	Y	Z	N	Z	N
Motor type max. voltage ph-ph	3-phase synchronous		V _{ac rms} (V _{dc})	230 (325)								420 (600)
Ultimate torque @ 20°C/s increase	magnet @ 25°C	T _u	Nm	9.3	10.6	10.6	19.6	22.4	22.4	34.1	33.6	91.6
Peak torque @ 6°C/s increase	magnet @ 25°C	T _p	Nm	6.2	7.1	7.1	12.5	14.2	14.2	21.7	21.4	58.3
Continuous torque	coil @ 100°C	T _c	Nm	4.1	4.2	4.2	9.4	9.7	9.7	15.7	15.0	36.3
Maximum speed ⁽³⁾ @ 48 Volt	@ T _c	n _{max}	rpm	142	467	965	0	165	441	0	259	0
Maximum speed @ max. voltage	@ T _c	n _{max}	rpm	2145	3871	6663	1084	2039	3604	555	2464	411
Motor torque constant	up to I _c	K _t	Nm/A _{rms}	0.96	0.54	0.31	1.92	1.07	0.62	3.45	0.93	9.20
Motor constant	coils @ 25°C	K _m	(Nm) ² /W	0.12	0.13	0.13	0.35	0.38	0.38	0.73	0.67	2.29
Ultimate current	magnet @ 25°C	I _u	A _{rms}	13.8	28.2	48.8	13.8	28.2	48.8	13.3	48.8	13.5
Peak current	magnet @ 25°C	I _p	A _{rms}	7.6	15.4	26.7	7.6	15.4	26.7	7.3	26.7	7.4
Maximum continuous current ⁽¹⁾	coils @ 100°C	I _c	A _{rms}	4.3	7.8	13.4	4.9	9.0	15.7	4.6	16.2	3.9
Back EMF phase-phase _{peak}		K _e	V/krpm	82	46	26	164	92	53	295	79	787
Back EMF phase-phase _{RMS}		K _e	V/krpm	58	32	19	116	65	37	209	56	556
Coil resistance per phase	coils @ 25°C ex. cable	R	Ω	2.47	0.75	0.25	3.47	1.03	0.35	5.45	0.44	12.30
Coil induction per phase	I < 0.6 I _p	L	mH	4.89	1.57	0.52	7.68	2.45	0.82	15.0	1.11	47.9
Electrical time constant	coils @ 25°C	τ _e	ms	2.0	2.1	2.1	2.2	2.4	2.4	2.8	2.5	3.9
Poles		N _{mgn}	nr	36	36	36	36	36	36	36	36	36
Continuous power loss	coils @ 100°C	P _c	W	174	174	174	326	326	326	441	441	750
Thermal resistance ⁽²⁾	coils to mount. sfc.	R _{th}	°C/W	0.43	0.43	0.43	0.23	0.23	0.23	0.17	0.17	0.10
Thermal time constant	up to 63% max. coiltemp	τ _{th}	s	25	29	29	19	22	22	21	21	29
Temperature cut-off / sensor				PTC 1kΩ / KTY83-122								
Stator OD		OD _s	mm	160								
Rotor ID		ID _R	mm	111								
Motor height		H _{motor}	mm	17			25			34		60
Lamination stack height		H _{arm}	mm	8			16			24		48
Rotor inertia		J _R	kg*m ²	4.7E-04			9.2E-04			1.4E-03		2.6E-03
Stator mass	excluding cables	M _S	g	527			875			1212		2555
Rotor mass		M _R	g	138			269			401		754
Total mass	excluding cables	M _T	g	665			1144			1613		3309
Cable mass	all cables	m	g	63	90	90	63	90	90	63	90	95
Cable type (power)	length 0.5 m	d	mm (AWG)	6.5 (20)	6.7 (14)	6.7 (14)	6.5 (20)	6.7 (14)	6.7 (14)	6.5 (20)	6.7 (14)	9.6 (18)
Cable type (sensor)	length 0.5 m	d	mm (AWG)	4.3 (26)								

All specifications ±10%



Stator

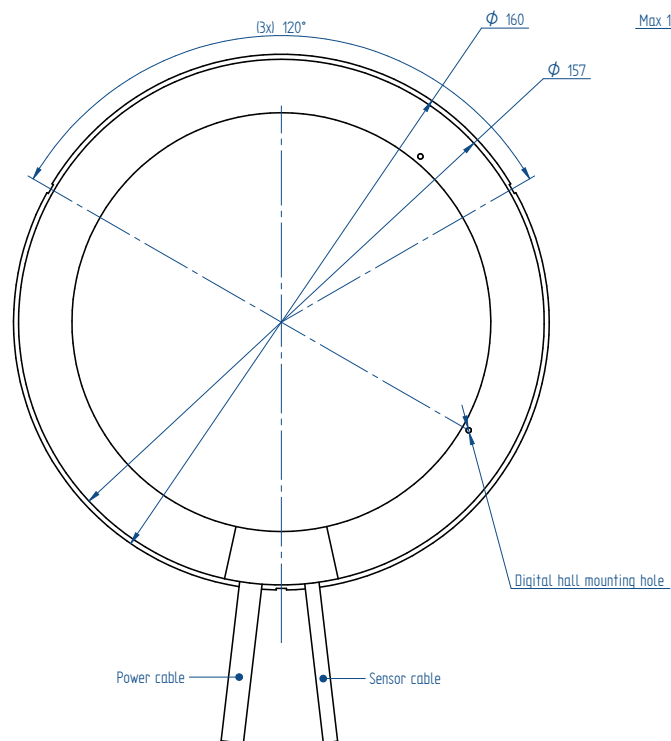


Rotor

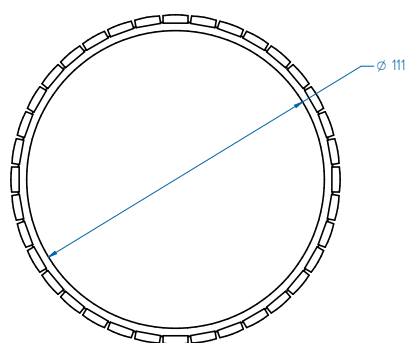


QTR-A 160-17

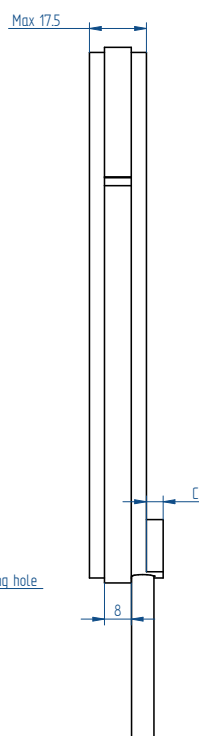



QTR-A 160-25

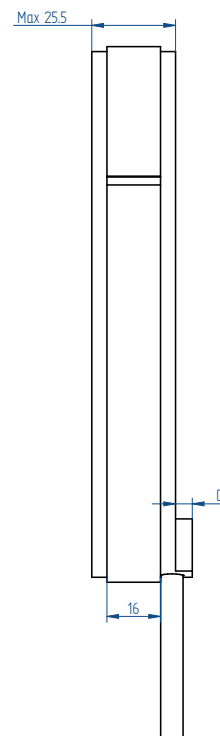

QTR-A 160-34

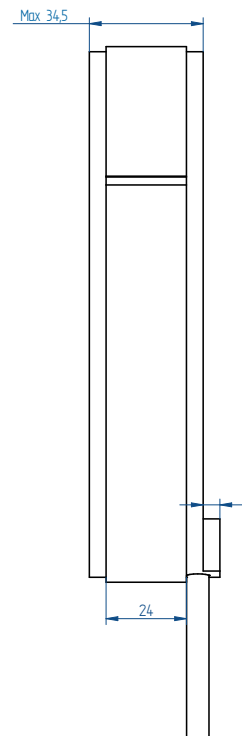

QTR-A 160-60

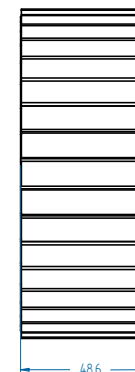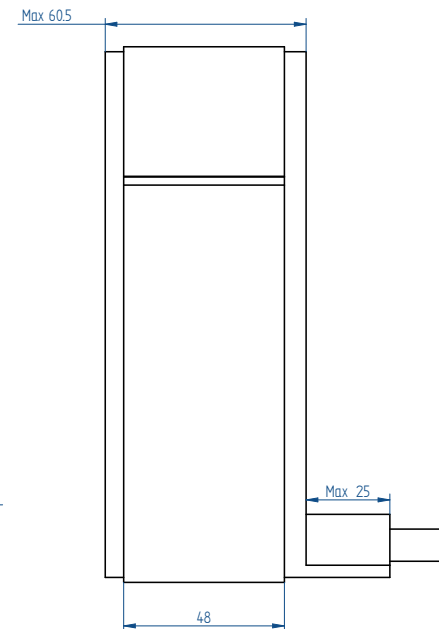

Winding	C (mm)
N	3.5
Y+Z	5.5

Mounting instructions and tolerances can be found in the torque installation manual. Manuals and 3D CAD files can be downloaded from our website.

* All sizes are in mm



QTL 210 series,
with a height of 65 mm


Torque QTL-A 210 series

	Parameter	Remarks	Symbol	Unit	QTL-A 210-65	QTL-A 210-85	QTL-A 210-105
Performance	Winding type				N	N	N
	Motortype max. voltage ph-ph	3-phase synchronous		$V_{ac\,rms} (V_{dc})$	480 (680)		
	Ultimate torque @ 20°C/s increase	magnet @ 25°C	T _u	Nm	173	259	346
	Peak torque @ 6°C/s increase	magnet @ 25°C	T _p	Nm	140	211	281
	Continuous torque	coil @ 100°C	T _c	Nm	65	103	142
	Stall torque	coil @ 100°C	T _s	Nm	46	73	100
	Maximum speed ⁽¹⁾	@ T _c @ 680 V _{dc}	n _{max}	rpm	716	457	326
	Motor torque constant	up to I _c	K _t	Nm/ _A rms	8.7	13.1	17.5
	Motor constant	coils @ 25°C	K _m	(Nm) ² /W	8.0	13.5	19.2
Electrical	Ultimate current	magnet @ 25°C	I _u	A _{rms}	22.0	22.0	22.0
	Peak current	magnet @ 25 °C	I _p	A _{rms}	16.9	16.9	16.9
	Maximum continuous current ⁽²⁾	coils @ 100°C	I _c	A _{rms}	7.45	7.88	8.11
	Stall current ⁽²⁾	coils @ 100°C	I _s	A _{rms}	5.27	5.57	5.74
	Back EMF phase-phase _{peak}		K _e	V/krpm	747	1121	1494
	Back EMF phase-phase _{RMS}		K _e	V/krpm	528	793	1057
	Coil resistance per phase	coils @ 25°C ex. cable	R	Ω	3.18	4.25	5.31
	Coil induction per phase	l < 0.6 I _p	L	mH	16.0	22.3	28.7
	Electrical time constant		τ _e	ms	5.0	5.3	5.4
Thermal	Poles		N _{mgn}	nr	26	26	26
	Continuous power loss	coils @ 100°C	P _c	W	690	1028	1363
	Thermal resistance ⁽³⁾	coils to mount. sfc.	R _{th}	°C/W	0.116	0.078	0.059
	Thermal time constant		τ _{th}	s	53	47	45
	Temperature cut-off / sensor				PTC 1kΩ (3x) / PT1000 (3x)		
Mechanical	Stator OD		OD _S	mm	210		
	Rotor ID		ID _R	mm	140		
	Motor height		H _{motor}	mm	65	85	105
	Lamination stack height		H _{arm}	mm	40	60	80
	Rotor inertia		J _R	kg*m ²	0.009	0.014	0.019
	Stator mass	excluding cables	M _S	kg	4.2	5.9	7.5
	Rotor mass		M _R	kg	1.6	2.4	3.2
	Total mass	excluding cables	M _T	kg	5.8	8.3	10.7
	Cable mass	all cables	m	g	500		
	Cable type (power)	length 2 m	d	mm (AWG)	10.6 (13)		
Cable type (sensor)	length 2 m	d	mm (AWG)	6.4 (25)			


1. Actual values depend on bus voltage.
Please check the T/n diagram in our manual or online simulation tool.
2. These values are only applicable when the mounting surface is at 20°C and the motor is driven at maximum continuous current.
If these values differ in your application, please check our simulation tool or manual.
3. R_{th} based on radial mounting of stator lamination stack.

All specifications ±10%


Stator

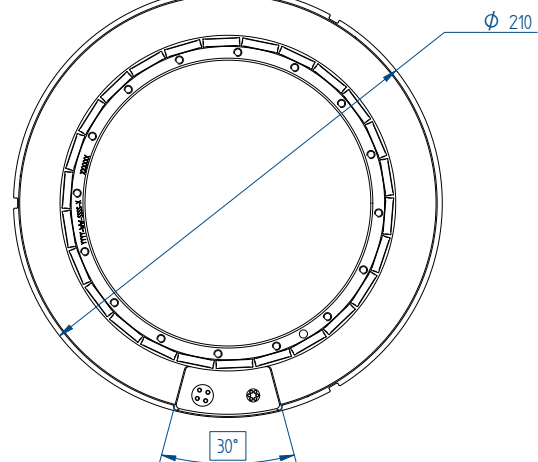


QTL-A 210-65

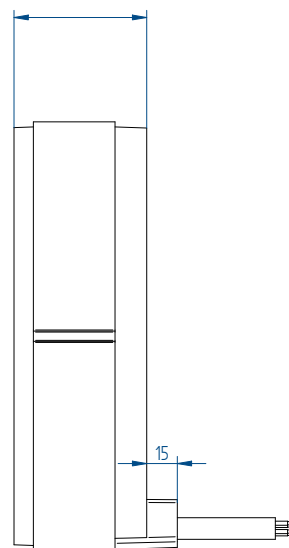




QTL-A 210-85

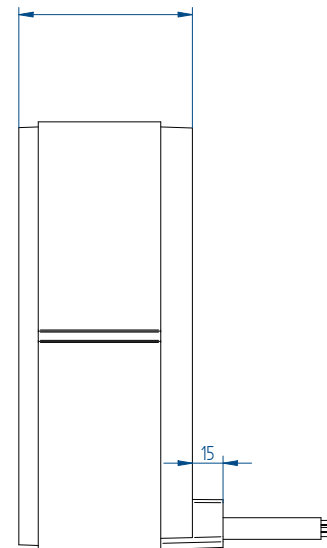

QTL-A 210-105

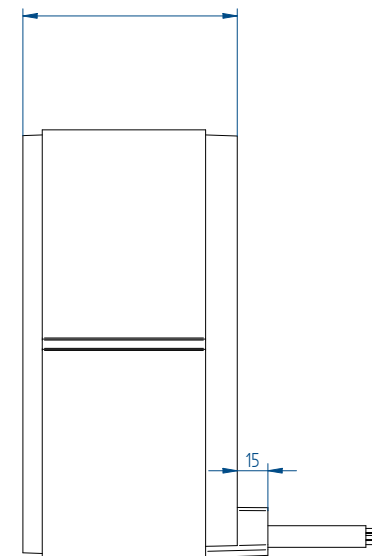

Rotor

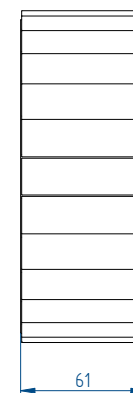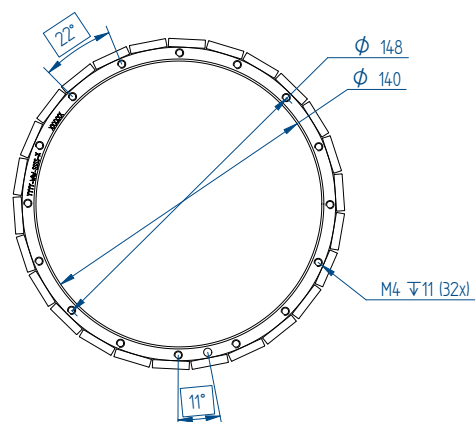

Mounting instructions and tolerances can be found in the torque installation manual. Manuals and 3D CAD files can be downloaded from our website.

* All sizes are in mm



QTL 230 series,
with a height of 85 mm

Torque QTL-A 230 series with cooling ring

Parameter	Remarks	Symbol	Unit	QTL-A 230-65	QTL-A 230-85	QTL-A 230-105
Performance				N	N	N
Winding type				480 (680)		
Motor type max. voltage ph-ph	3-phase synchronous		$V_{ac rms} (V_{dc})$			
Ultimate torque @ 20°C/s increase	magnet @ 25°C	T_u	Nm	173	259	346
Peak torque @ 6°C/s increase	magnet @ 25°C	T_p	Nm	140	211	281
Continuous torque	coil @ 100°C	T_c	Nm	67	107	147
Stall torque	coil @ 100°C	T_s	Nm	48	76	104
Maximum speed ⁽¹⁾	@ T_c @ 680 V _{dc}	n_{max}	rpm	709	451	321
Motor torque constant	up to I_c	K_t	Nm/A _{rms}	8.7	13.1	17.5
Motor constant	coils @ 25°C	K_m	(Nm) ² /W	8.0	13.5	19.2
Electrical						
Ultimate current	magnet @ 25°C	I_u	A _{rms}	22.0	22.0	22.0
Peak current	magnet @ 25 °C	I_p	A _{rms}	16.9	16.9	16.9
Maximum continuous current ⁽²⁾	coils @ 100°C	I_c	A _{rms}	7.69	8.16	8.42
Stall current ⁽²⁾	coils @ 100°C	I_s	A _{rms}	5.44	5.77	5.95
Back EMF phase-phase _{peak}		K_e	V/krpm	747	1121	1494
Back EMF phase-phase _{RMS}		K_e	V/krpm	528	793	1057
Coil resistance per phase	coils @ 25°C ex. cable	R	Ω	3.18	4.25	5.31
Coil induction per phase	$I < 0.6 I_p$	L	mH	16.0	22.3	28.7
Electrical time constant		τ_e	ms	5.0	5.3	5.4
Poles		N_{mgn}	nr	26	26	26
Thermal						
Continuous power loss	coils @ 100°C	P_c	W	735	1102	1469
Thermal resistance ⁽³⁾	coils to mount. sfc.	R_{th}	°C/W	0.109	0.073	0.054
Thermal time constant	up to 63% max. coiltemp	τ_{th}	s	49	44	41
Water cooling flow	for $\Delta T=3K$	Φ_w	l/min	3.5	5.3	7.0
Water cooling pressure drop	order of magnitude	ΔP_w	bar	0.7	1.0	1.5
Temperature cut-off / sensor				PTC 1kΩ (3x) / PT1000 (3x)		
Mechanical						
Stator OD		OD_s	mm	230		
Rotor ID		ID_R	mm	140		
Motor height		H_{motor}	mm	65	85	105
Lamination stack height		H_{arm}	mm	40	60	80
Rotor inertia		J_R	kg*m ²	0.009	0.014	0.019
Stator mass	excluding cables	M_s	kg	5.2	7.2	9.0
Rotor mass		M_R	kg	1.6	2.4	3.2
Total mass	excluding cables	M_T	kg	6.8	9.6	12.2
Cable mass	all cables	m	g	500		
Cable type (power)	length 2 m	d	mm (AWG)	10.6 (13)		
Cable type (sensor)	length 2 m	d	mm (AWG)	6.4 (25)		

1. Actual values depend on bus voltage.

Please check the T/n diagram in our manual or online simulation tool.

2. These values are only applicable when the mounting surface is at 20°C and the motor is driven at maximum continuous current.

If these values differ in your application, please check our simulation tool or manual.

3. R_{th} based on given water flow and pressure.





All specifications ±10%

QTL-A 230-65




QTL-A 230-85

QTL-A 230-105

Stator

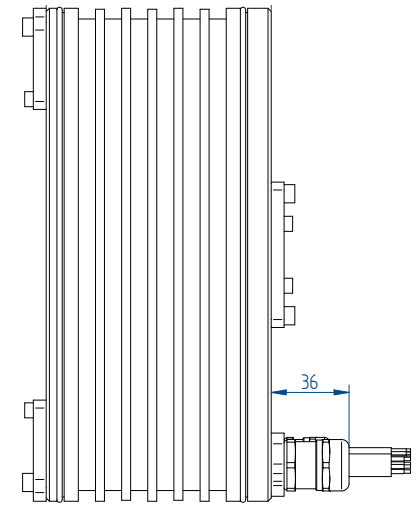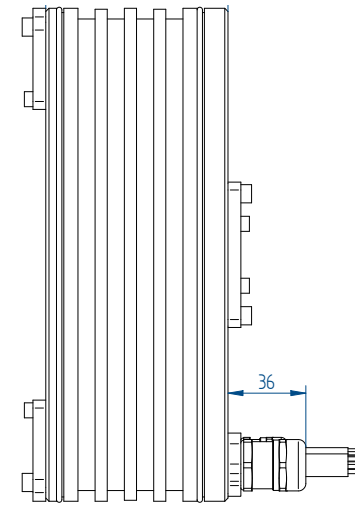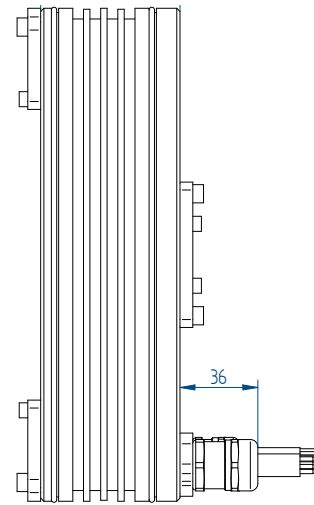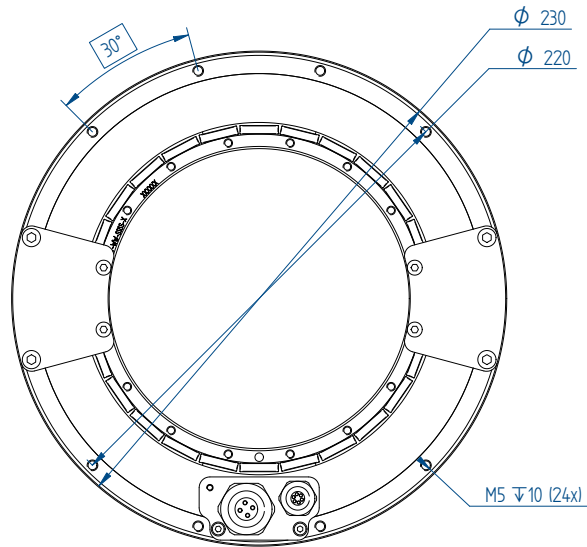

Rotor

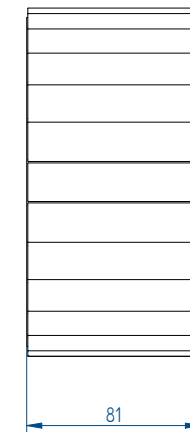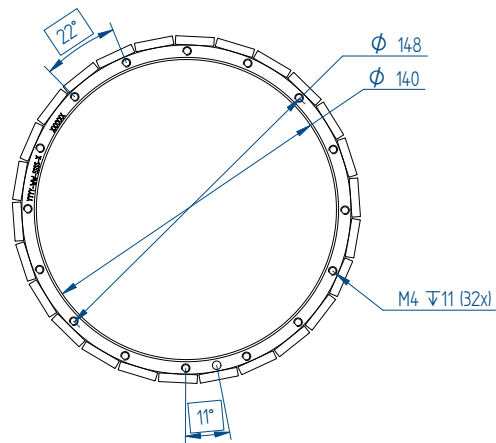

Mounting instructions and tolerances can be found in the torque installation manual. Manuals and 3D CAD files can be downloaded from our website.

* All sizes are in mm

Torque QTL-A 290 series




QTL 290 series,
with a height of 65 mm

1. Actual values depend on bus voltage.
Please check the T/n diagram in our manual or online simulation tool.
2. These values are only applicable when the mounting surface is at 20°C and the motor is driven at maximum continuous current.
If these values differ in your application, please check our simulation tool or manual.
3. R_{th} based on radial mounting of stator lamination stack.


Parameter	Remarks	Symbol	Unit	QTL-A 290-65	QTL-A 290-85	QTL-A 290-105
Performance				N	N	N
Winding type				480 (680)		
Motor type max. voltage ph-ph	3-phase synchronous		V _{ac rms} (V _{dc})			
Ultimate torque @ 20°C/s increase	magnet @ 25°C	T _u	Nm	389	583	778
Peak torque @ 6°C/s increase	magnet @ 25°C	T _p	Nm	316	474	632
Continuous torque	coil @ 100°C	T _c	Nm	140	222	305
Stall torque	coil @ 100°C	T _s	Nm	99	157	215
Maximum speed ⁽¹⁾	@ T _c @ 680 V _{dc}	n _{max}	rpm	306	189	130
Motor torque constant	up to I _c	K _t	Nm/A _{rms}	19.7	29.5	39.3
Motor constant	coils @ 25°C	K _m	(Nm) ² /W	27.0	45.5	64.7
Electrical						
Ultimate current	magnet @ 25°C	I _u	A _{rms}	22.0	22.0	22.0
Peak current	magnet @ 25°C	I _p	A _{rms}	16.9	16.9	16.9
Maximum continuous current ⁽²⁾	coils @ 100°C	I _c	A _{rms}	7.14	7.54	7.75
Stall current ⁽²⁾	coils @ 100°C	I _s	A _{rms}	5.05	5.33	5.48
Back EMF phase-phase _{peak}		K _e	V/krpm	1681	2521	3362
Back EMF phase-phase _{RMS}		K _e	V/krpm	1189	1783	2377
Coil resistance per phase	coils @ 25°C ex. cable	R	Ω	4.77	6.37	7.96
Coil induction per phase	I < 0.6 I _p	L	mH	23.9	34.7	45.5
Electrical time constant		τ _e	ms	5.0	5.5	5.7
Poles		N _{mgn}	nr	38	38	38
Thermal						
Continuous power loss	coils @ 100°C	P _c	W	948	1410	1864
Thermal resistance ⁽³⁾	coils to mount. sfc.	R _{th}	°C/W	0.084	0.057	0.043
Thermal time constant	up to 63% max. coiltemp	τ _{th}	s	57	52	49
Temperature cut-off / sensor				PTC 1kΩ (3x) / PT1000 (3x)		
Mechanical						
Stator OD		OD _s	mm	290		
Rotor ID		ID _R	mm	220		
Motor height		H _{motor}	mm	65	85	105
Lamination stack height		H _{arm}	mm	40	60	80
Rotor inertia		J _R	kg*m ²	0.031	0.046	0.061
Stator mass	excluding cables	M _s	kg	6.0	8.3	10.8
Rotor mass		M _R	kg	2.3	3.5	4.7
Total mass	excluding cables	M _T	kg	8.3	11.8	15.5
Cable mass	all cables	m	g	500		
Cable type (power)	length 2 m	d	mm (AWG)	10.6 (13)		
Cable type (sensor)	length 2 m	d	mm (AWG)	6.4 (25)		

All specifications ±10%


Stator

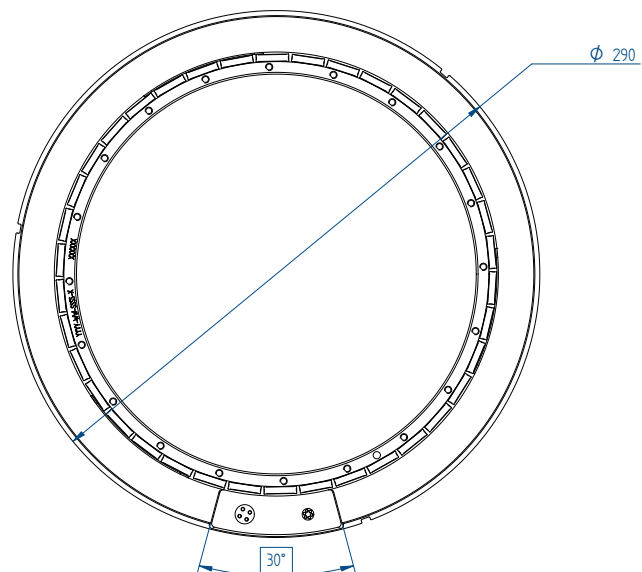



Rotor

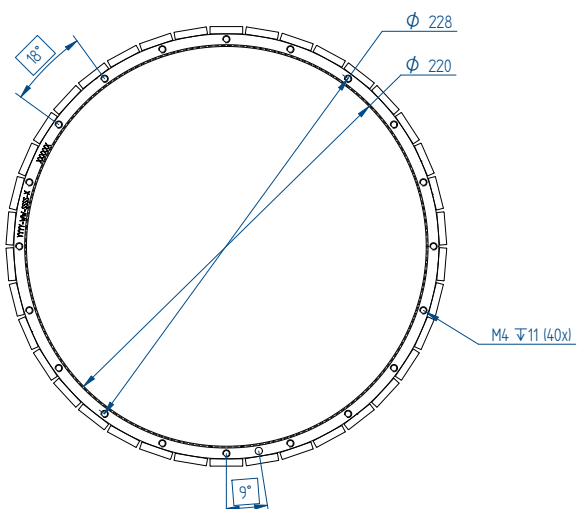


QTL-A 290-65

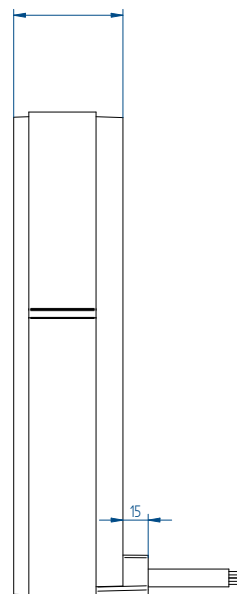

QTL-A 290-85

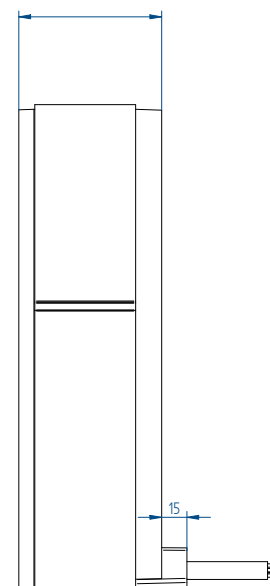

QTL-A 290-105

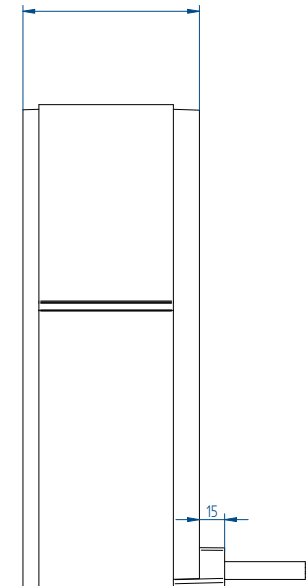

Mounting instructions and tolerances can be found in the torque installation manual. Manuals and 3D CAD files can be downloaded from our website.

* All sizes are in mm



QTL 310 series,
with a height of 85 mm

Torque QTL-A 310 series with cooling ring

Parameter	Remarks	Symbol	Unit	QTL-A 310-65	QTL-A 310-85	QTL-A 310-105
Performance	Winding type			N	N	N
	Motortype max. voltage ph-ph	3-phase synchronous	$V_{ac rms} (V_{dc})$	480 (680)		
	Ultimate torque @ 20°C/s increase	magnet @ 25°C	T_u	389	583	778
	Peak torque @ 6°C/s increase	magnet @ 25°C	T_p	316	474	632
	Continuous torque	coil @ 100°C	T_c	151	241	331
	Stall torque	coil @ 100°C	T_s	107	170	234
	Maximum speed ⁽¹⁾	@ T_c @ 680 V _{dc}	n_{max}	298	182	124
	Motor torque constant	up to I_c	K_t	19.7	29.5	39.3
	Motor constant	coils @ 25°C	K_m	27.0	45.5	64.7
				(Nm) ² /W		
Electrical	Ultimate current	magnet @ 25°C	I_u	22.0	22.0	22.0
	Peak current	magnet @ 25°C	I_p	16.9	16.9	16.9
	Maximum continuous current ⁽²⁾	coils @ 100°C	I_c	7.70	8.16	8.42
	Stall current ⁽²⁾	coils @ 100°C	I_s	5.44	5.77	5.96
	Back EMF phase-phase _{peak}		K_e	1681	2521	3362
	Back EMF phase-phase _{RMS}		K_e	1189	1783	2377
	Coil resistance per phase	coils @ 25°C ex. cable	R	4.77	6.37	7.96
	Coil induction per phase	$I < 0.6 I_p$	L	23.9	34.7	45.5
	Electrical time constant		τ_e	5.0	5.5	5.7
	Poles		N_{mgn}	38	38	38
Thermal	Continuous power loss	coils @ 100°C	P_c	1102	1653	2204
	Thermal resistance ⁽³⁾	coils to mount. sfc.	R_{th}	0.073	0.048	0.036
	Thermal time constant	up to 63% max. coiltemp	τ_{th}	49	44	41
	Water cooling flow	for $\Delta T=3K$	Φ_W	5.3	7.9	10.5
	Water cooling pressure drop	order of magnitude	ΔP_w	1.0	1.4	2.0
Mechanical	Temperature cut-off / sensor					
	PTC 1kΩ (3x) / PT1000 (3x)					
	Stator OD		OD _S	mm	310	
	Rotor ID		ID _R	mm	220	
	Motor height		H _{motor}	mm	65	105
	Lamination stack height		H _{arm}	mm	40	80
	Rotor inertia		J _R	kg*m ²	0.031	0.061
	Stator mass	excluding cables	M _S	kg	7.4	12.9
	Rotor mass		M _R	kg	2.3	4.7
	Total mass	excluding cables	M _T	kg	9.7	17.6
	Cable mass	all cables	m	g	500	
	Cable type (power)	length 2 m	d	mm (AWG)	10.6 (13)	
	Cable type (sensor)	length 2 m	d	mm (AWG)	6.4 (25)	

1. Actual values depend on bus voltage.

Please check the T/n diagram in our manual or online simulation tool.


2. These values are only applicable when the mounting surface is at 20°C and the motor is driven at maximum continuous current.

If these values differ in your application, please check our simulation tool or manual.


3. R_{th} based on given water flow and pressure.

All specifications ±10%



Stator

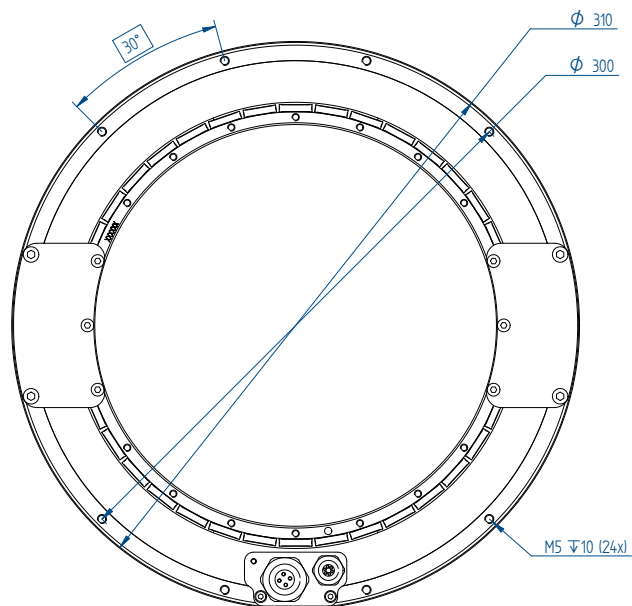



Rotor

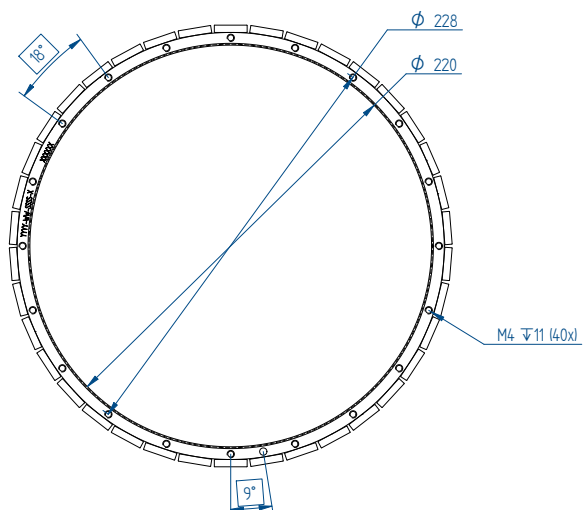



QTL-A 310-65

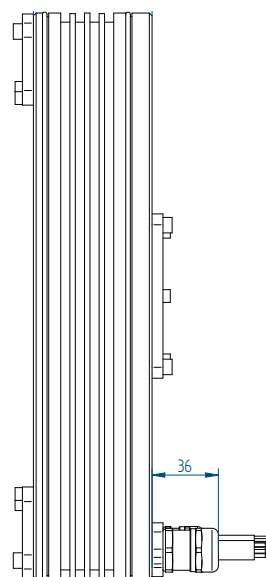

QTL-A 310-85

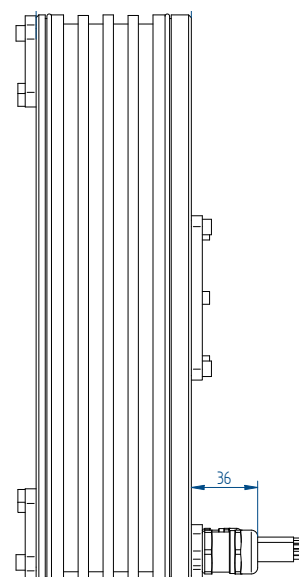

QTL-A 310-105

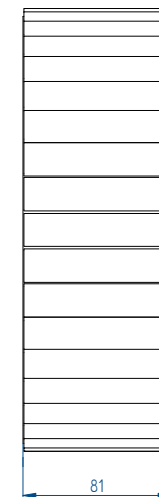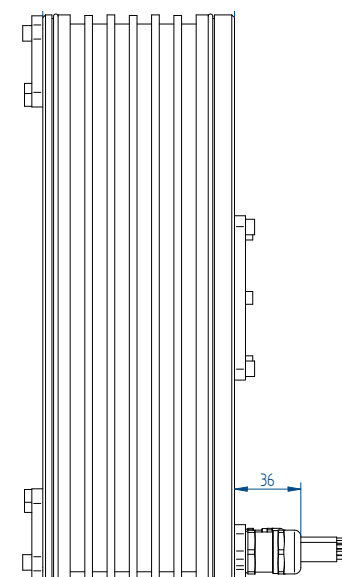

Mounting instructions and tolerances can be found in the torque installation manual. Manuals and 3D CAD files can be downloaded from our website.

* All sizes are in mm



QTL 385 series,
with a height of 85 mm

Torque QTL-A 385 series with cooling ring

Parameter		Remarks	Symbol	Unit	QTL-A 385-85	QTL-A 385-105
Performance	Winding type				I	I
	Motortype max. voltage ph-ph	3-phase synchronous		V _{ac,rms} (V _{dc})	480 (680)	
	Ultimate torque @ 20°C/s increase	magnet @ 25°C	T _u	Nm	1026	1368
	Peak torque @ 6°C/s increase	magnet @ 25°C	T _p	Nm	833	1111
	Continuous torque	coil @ 100°C	T _c	Nm	407	560
	Stall torque	coil @ 100°C	T _s	Nm	288	396
	Maximum speed ⁽¹⁾	@ Tc @ 680 Vdc	n _{max}	rpm	231	164
	Motor torque constant	up to Ic	K _t	Nm/A _{rms}	25.9	34.6
	Motor constant	coils @ 25°C	K _m	(Nm) ² /W	105.4	149.9
Electrical	Ultimate current	magnet @ 25°C	I _u	A _{rms}	44.0	44.0
	Peak current	magnet @ 25°C	I _p	A _{rms}	33.8	33.8
	Maximum continuous current ⁽²⁾	coils @ 100°C	I _c	A _{rms}	15.7	16.2
	Stall current ⁽²⁾	coils @ 100°C	I _s	A _{rms}	11.1	11.5
	Back EMF phase-phase _{peak}		K _e	V/krpm	2217	2956
	Back EMF phase-phase _{RMS}		K _e	V/krpm	1567	2090
	Coil resistance per phase	coils @ 25°C ex. cable	R	Ω	2.13	2.66
	Coil induction per phase	I < 0.6 Ip	L	mH	11.6	15.2
	Electrical time constant		τ _e	ms	5.4	5.7
Poles		N _{mgn}	nr	50	50	
Thermal	Continuous power loss	coils @ 100°C	P _c	W	2044	2724
	Thermal resistance ⁽³⁾	coils to mount. sfc.	R _{th}	°C/W	0.039	0.029
	Thermal time constant		τ _{th}	s	48	45
	Water cooling flow	for ΔT=3K	Φ _w	l/min	9.8	13.0
	Temperature cut-off / sensor				PTC 1kΩ (3x)/ PT1000 (3x)	
Mechanical	Stator OD		OD _s	mm	385	
	Rotor ID		ID _R	mm	280	
	Motor height		H _{motor}	mm	85	105
	Lamination stack height		H _{arm}	mm	60	80
	Rotor inertia		J _R	kg*m ²	0.146	0.195
	Stator mass	excluding cables	M _s	kg	12.75	17
	Rotor mass		M _R	kg	6.68	8.9
	Total mass	excluding cables	M _T	kg	19.43	25.9
	Cable mass	all cables	m	kg	0.5	
	Cable type (power)	length 2 m	d	mm (AWG)	10.6 (13)	
	Cable type (sensor)	length 2 m	d	mm (AWG)	8.9 (22)	

1. Actual values depend on bus voltage.


Please check the T/n diagram in our manual or online simulation tool.

2. These values are only applicable when the mounting surface is at 20°C and the motor is driven at maximum continuous current. If these values differ in your application, please check our simulation tool or manual.






3. R_{th} based on given water flow and pressure.

All specifications $\pm 10\%$

Stator

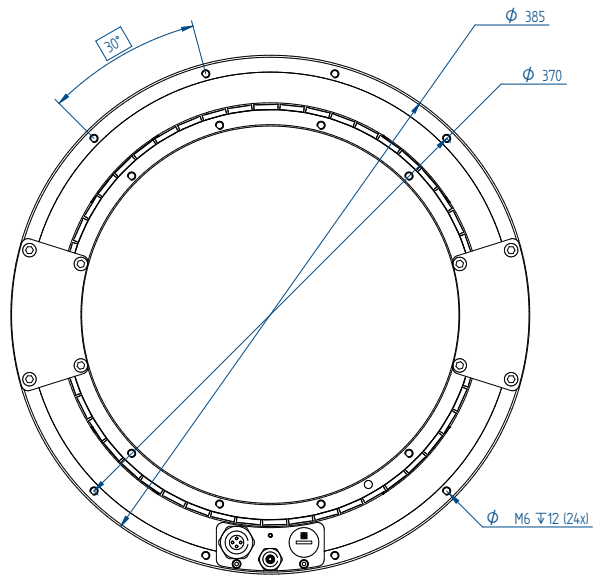

Rotor

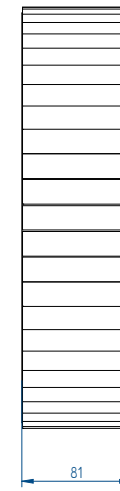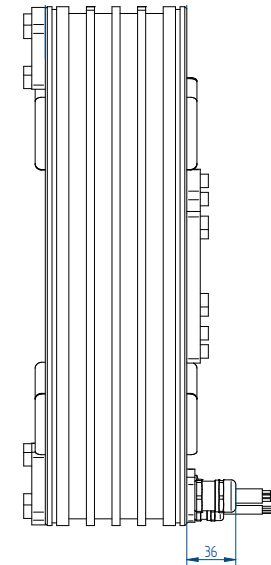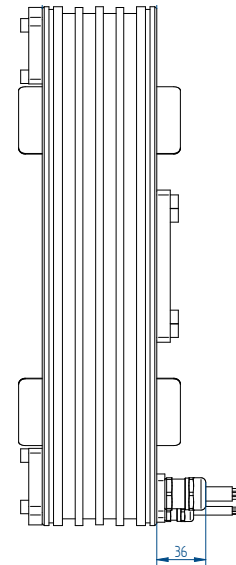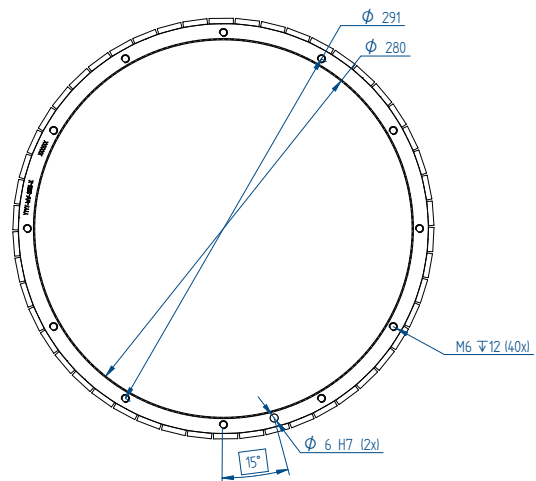

Mounting instructions and tolerances can be found in the torque installation manual. Manuals and 3D CAD files can be downloaded from our website.

* All sizes are in mm



QTL 485 series,
with a height of 105 mm

Torque QTL-A 485 series with cooling ring

	Parameter	Remarks	Symbol	Unit	QTL-A 485-85	QTL-A 485-105
Performance	Winding type				I	I
	Motortype max. voltage ph-ph	3-phase synchronous		$V_{acrms} (V_{dc})$	480 (680)	
	Ultimate torque @ 20°C/s increase	magnet @ 25°C	T_u	Nm	1651	2202
	Peak torque @ 6°C/s increase	magnet @ 25°C	T_p	Nm	1342	1789
	Continuous torque	coil @ 100°C	T_c	Nm	659	907
	Stall torque	coil @ 100°C	T_s	Nm	466	642
	Maximum speed ⁽¹⁾	@ T_c @ 680 Vdc	n_{max}	rpm	138	96
	Motor torque constant	up to I_c	K_t	Nm/ A_{rms}	41.7	55.6
	Motor constant	coils @ 25°C	K_m	(Nm) ² /W	218.5	310.7
Electrical	Ultimate current	magnet @ 25°C	I_u	A_{rms}	44.0	44.0
	Peak current	magnet @ 25°C	I_p	A_{rms}	33.8	33.8
	Maximum continuous current ⁽²⁾	coils @ 100°C	I_c	A_{rms}	15.8	16.3
	Stall current ⁽²⁾	coils @ 100°C	I_s	A_{rms}	11.2	11.5
	Back EMF phase-phase _{peak}		K_e	V/krpm	3569	4758
	Back EMF phase-phase _{RMS}		K_e	V/krpm	2523	3364
	Coil resistance per phase	coils @ 25°C ex. cable	R	Ω	2.66	3.32
	Coil induction per phase	$I < 0.6 I_p$	L	mH	14.5	19.0
	Electrical time constant		τ_e	ms	5.4	5.7
Thermal	Poles		N_{mgn}	nr	62	62
	Continuous power loss	coils @ 100°C	P_c	W	2584	3444
	Thermal resistance ⁽³⁾	coils to mount. sfc.	R_{th}	°C/W	0.031	0.023
	Thermal time constant		τ_{th}	s	47	44
	Water cooling flow	for ΔT=3K	Φ_W	l/min	12.4	16.5
Mechanical	Temperature cut-off / sensor				PTC 1kΩ (3x)/ PT1000 (3x)	
	Stator OD		OD_s	mm	485	
	Rotor ID		ID_R	mm	366	
	Motor height		H_{motor}	mm	85	105
	Lamination stack height		H_{arm}	mm	60	80
	Rotor inertia		J_R	kg*m ²	0.357	0.476
	Stator mass	excluding cables	M_s	kg	18.75	25
	Rotor mass		M_R	kg	9.68	12.9
	Total mass	excluding cables	M_T	kg	28.43	37.9
	Cable mass	all cables	m	kg	0.5	
	Cable type (power)	length 2 m	d	mm (AWG)	10.6 (13)	
	Cable type (sensor)	length 2 m	d	mm (AWG)	8.9 (22)	

1. Actual values depend on bus voltage.


Please check the T/n diagram in our manual or online simulation tool.

2. These values are only applicable when the mounting surface is at 20°C and the motor is driven at maximum continuous current. If these values differ in your application, please check our simulation tool or manual.





3. R_{th} based on given water flow and pressure.

All specifications $\pm 10\%$

Stator

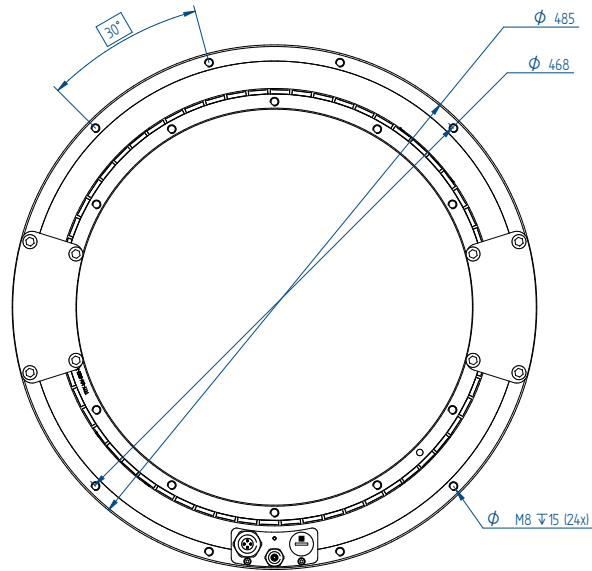

Rotor

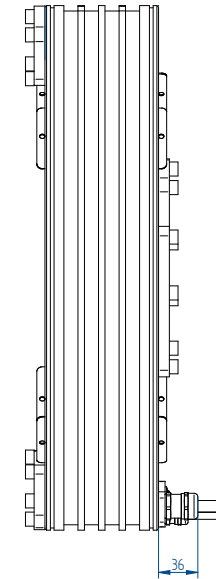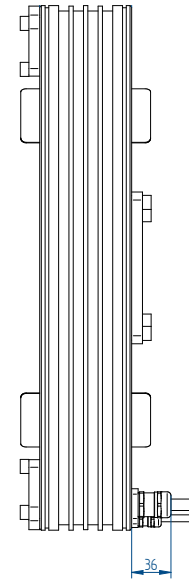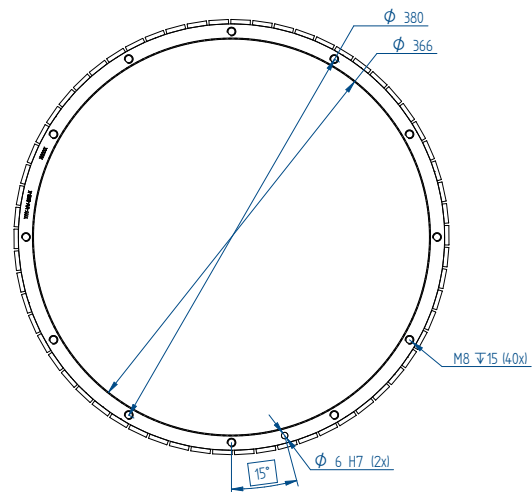

Mounting instructions and tolerances can be found in the torque installation manual. Manuals and 3D CAD files can be downloaded from our website.

* All sizes are in mm

Additions

To use our motor simulation tool, download 3D & CAD files, installation manuals, product specifications and more, visit our website at:
www.tecnotion.com



Linear motors

Iron core & ironless motor series

Tecnotion's linear motor series rely on 30 years of linear motor development experience. All motors excel in their force density ratings. They offer continuous force in a range of 10 Newton to 3000 Newton in a surprisingly small package.

Tecnotion can provide linear solutions for most applications which require a strong iron core linear motor or a highly dynamic ironless type linear motor.




Vacuum series

Outgassing down to 10^{-8} mbar

Many years of experience is used in designing and building vacuum coils and magnets. Tecnotion can supply any vacuum linear motor that can match even the strictest vacuum requirements, for instance in the semiconductor industry.

Our vacuum rated ironless linear motors are specifically designed coil units and magnet yokes for use in high vacuum, down to 10^{-8} mbar.

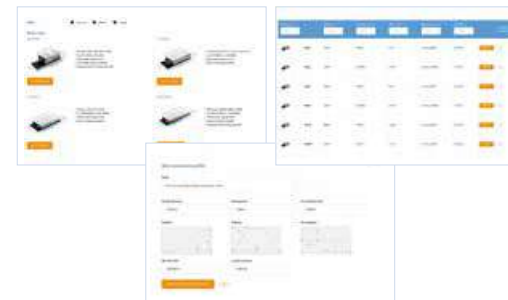

Simulation tool

Analyze your application

Save precious time by using our FREE online motor simulation tool. Our specialized software helps you find the best motor for the application and generate reports within seconds, without having to make time consuming calculations by hand.

The tool will provide you with diagrams for position, velocity, acceleration, jerk, torque, power, voltage, current, temperature and torque vs. velocity. Find the simulation tool at **www.tecnotion.com/simtool**.



Custom motors

Motor solutions

Besides the standard catalogue items we offer custom linear motor solutions. Some examples: custom windings, cable confection and vacuum motors for transport and positioning in vacuum.

Besides this Tecnotion offers moving magnet motors and linear solutions, completely designed toward your needs. For more information please contact Tecnotion.

Article numbers

Series	Article	Article code	Series	Article	Article code
QTR	TORQUE KIT QTR-A-65-17 N	10 8062	QTR	TORQUE KIT QTR-A-160-17-Z	10 9402
QTR	TORQUE KIT QTR-A-65-25 N	10 8393	QTR	TORQUE KIT QTR-A-160-25-N	4022 368 6161
QTR	TORQUE KIT QTR-A-65-34 Y	10 8394	QTR	TORQUE KIT QTR-A-160-25-Y	10 9397
QTR	TORQUE KIT QTR-A-65-60 Y	10 8395	QTR	TORQUE KIT QTR-A-160-25-Z	10 9403
QTR	TORQUE KIT QTR-A-78-17 N	10 8397	QTR	TORQUE KIT QTR-A-160-34-N	4022 368 6162
QTR	TORQUE KIT QTR-A-78-25 Y	10 8399	QTR	TORQUE KIT QTR-A-160-34-Z	10 8160
QTR	TORQUE KIT QTR-A-78-34 Y	10 8400	QTR	TORQUE KIT QTR-A-160-60-N	4022 368 6163
QTR	TORQUE KIT QTR-A-78-60 Y	10 8401	QTR	DIGITAL HALL MODULE QTR 65	10 8781
QTR	TORQUE KIT QTR-A-105-17-N	4022 368 6120	QTR	DIGITAL HALL MODULE QTR 78	10 8782
QTR	TORQUE KIT QTR-A-105-17-Y	10 8848	QTR	DIGITAL HALL MODULE QTR 105	10 8233
QTR	TORQUE KIT QTR-A-105-17-Z	10 8158	QTR	DIGITAL HALL MODULE QTR 133	10 8234
QTR	TORQUE KIT QTR-A-105-25-N	4022 368 6121	QTR	DIGITAL HALL MODULE QTR 160	10 8235
QTR	TORQUE KIT QTR-A-105-25-Y	10 9393	QTL	TORQUE KIT QTL-A-210-65-N	11 1171
QTR	TORQUE KIT QTR-A-105-25-Z	10 9398	QTL	TORQUE KIT QTL-A-210-85-N	11 1173
QTR	TORQUE KIT QTR-A-105-34-N	4022 368 6122	QTL	TORQUE KIT QTL-A-210-105-N	11 1175
QTR	TORQUE KIT QTR-A-105-34-Y	10 9394	QTL	TORQUE KIT QTL-A-230-65-N	11 1127
QTR	TORQUE KIT QTR-A-105-34-Z	10 9399	QTL	TORQUE KIT QTL-A-230-85-N	11 1145
QTR	TORQUE KIT QTR-A-105-60-N	4022 368 6123	QTL	TORQUE KIT QTL-A-230-105-N	11 1153
QTR	TORQUE KIT QTR-A-133-17-N	4022 368 6140	QTL	TORQUE KIT QTL-A-290-65-N	11 1177
QTR	TORQUE KIT QTR-A-133-17-Y	10 9395	QTL	TORQUE KIT QTL-A-290-85-N	11 1180
QTR	TORQUE KIT QTR-A-133-17-Z	10 9400	QTL	TORQUE KIT QTL-A-290-105-N	11 1182
QTR	TORQUE KIT QTR-A-133-25-N	4022 368 6141	QTL	TORQUE KIT QTL-A-310-65-N	11 1078
QTR	TORQUE KIT QTR-A-133-25-Y	109396	QTL	TORQUE KIT QTL-A-310-85-N	11 1061
QTR	TORQUE KIT QTR-A-133-25-Z	10 8159	QTL	TORQUE KIT QTL-A-310-105-N	11 1100
QTR	TORQUE KIT QTR-A-133-34-N	4022 368 6142	QTL	TORQUE KIT QTL-A-385-85-I	11 1733
QTR	TORQUE KIT QTR-A-133-34-Z	10 9401	QTL	TORQUE KIT QTL-A-385-105-I	11 1732
QTR	TORQUE KIT QTR-A-133-60-N	4022 368 6143	QTL	TORQUE KIT QTL-A-485-85-I	11 1712
QTR	TORQUE KIT QTR-A-160-17-N	4022 368 6160	QTL	TORQUE KIT QTL-A-485-105-I	11 1711
QTR	TORQUE KIT QTR-A-160-17-Y	10 7771			

This catalogue is offered to you by:



Tecnotion Headquarters

Twentepoort West 15
7609 RD Almelo
The Netherlands

Tel. +31 (0)546 536 300
Fax +31 (0)546 536 380
sales@tecnotion.com

Tecnotion D-A-CH

Elsenheimerstraße 59
80687 Munich
Germany

Tel. +49 89 381537-400
Fax +49 89 381537-409
info@tecnotion.de

Tecnotion East Europe

Ul. Ryżowa 49
02-495 Warsaw
Poland

Tel. +48 606 544 046
info@tecnotion.pl

Tecnotion Rep. of Korea

Room #409,
Seoul Forest Halla Eco Valley
25, Ttukseom-ro 1-gil
04778 Seongdong-gu,
Seoul South Korea

Tel. +82 (0)10 4540 5599
korea@tecnotion.com

Tecnotion USA

200 Broad Hollow Rd -
Suite 207
Melville, NY, 11747
United States

Tel.+01 (631) 983-2833
salesusa@tecnotion.com

Tecnotion China

Building 15
369 Lushan Road
SND NEP, Suzhou
China

Tel: +86-512-68760183
sales@tecnotion.com.cn